

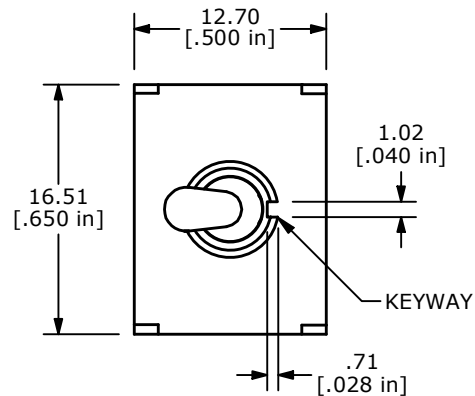
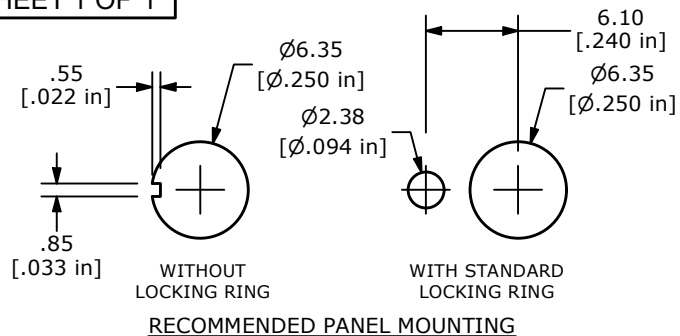
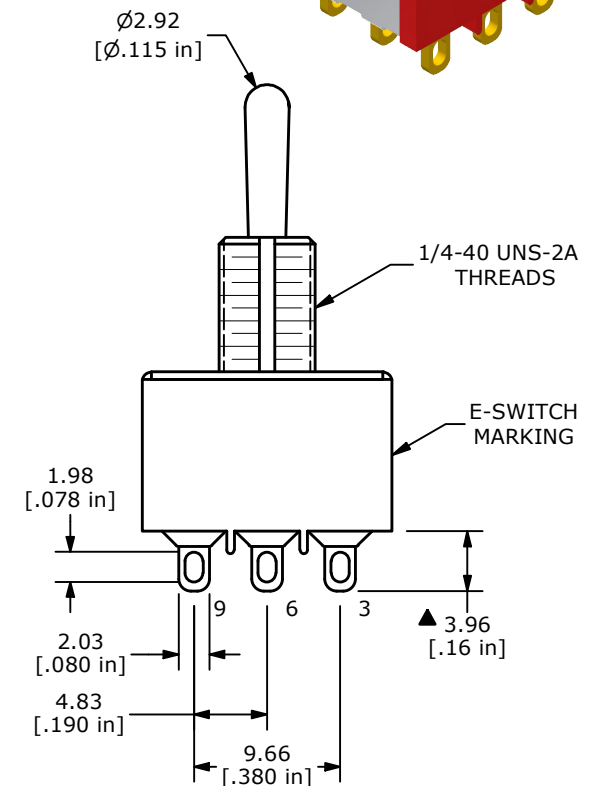


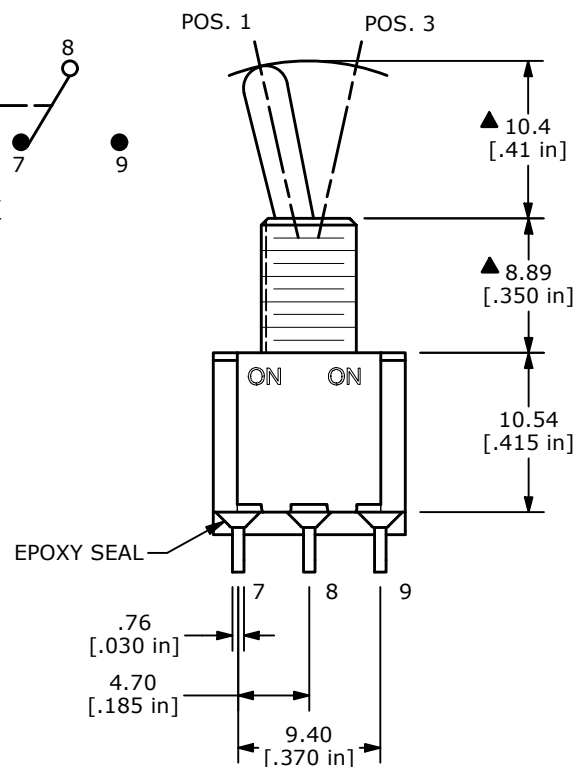

| ▲ SWITCH FUNCTION |        |             |
|-------------------|--------|-------------|
| POS. 1            | POS. 2 | POS. 3      |
|                   |        |             |
| ON                | NONE   | ON          |
| 2-3, 5-6, 8-9     | N/A    | 2-15-4, 8-7 |

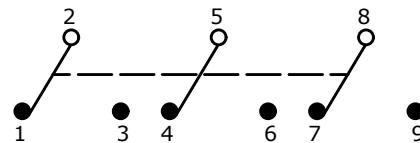

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | E-SWITCH®            |          |    |         | OBJECT ID |
|-----|------------|-------------------|----------|----|----------------------|----------|----|---------|-----------|
| B   | ECO-102352 | 100 SERIES UPDATE | 01/10/24 | MR | TITLE 1003P1T1B1M1RE |          |    |         | 000024402 |
|     |            |                   |          |    | SCALE                | DATE     | DR | DWG     | REV       |
|     |            |                   |          |    | 2:1                  | 5/7/2004 | AR | T131012 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED