

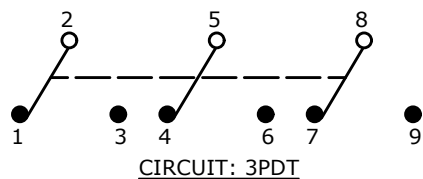
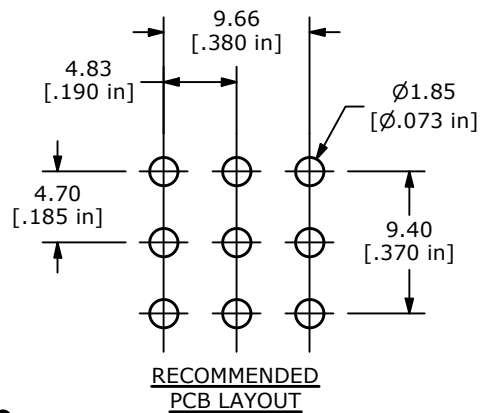


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6, 8-9	N/A	2-1, 5-4, 8-7

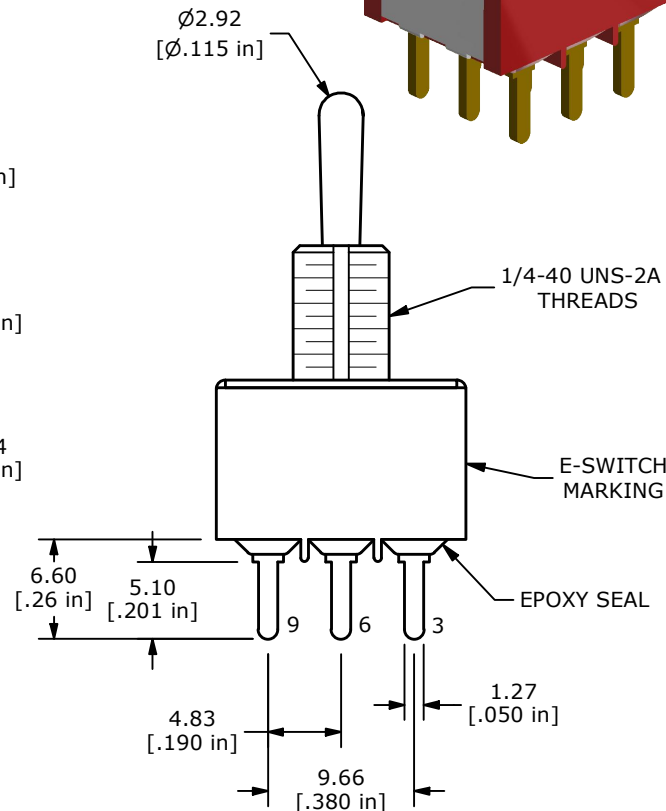

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD PLATED
5. RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC or DC)
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
7. MECHANICAL LIFE: 40,000
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. HARDWARE INCLUDED: T100011 - LOCK WASHER (1)
T100015 - LOCK RING (1)
T100000 - HEX NUT (2)

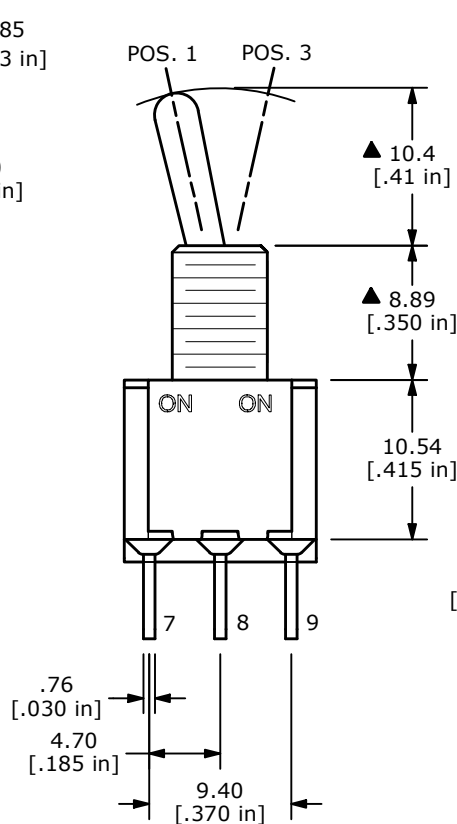

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103399	Release	04/29/25	MW



OBJECT ID
100130224

TITLE 1003P1T1B1M2REH				
SCALE 2:1	DATE 4/28/2025	DR MW	DWG ST131059	REV A