



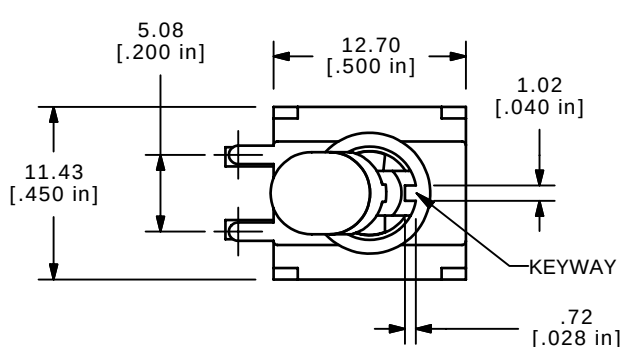




The diagram shows a graph with 6 nodes labeled 1 through 6. Nodes 1, 3, 4, and 6 are solid black circles. Nodes 2 and 5 are open circles. Edges connect the following pairs of nodes: (1, 2), (2, 3), (3, 4), (4, 5), and (5, 6). The edge between nodes 3 and 4 is a dashed line, while all other edges are solid lines.

CIRCUIT: DPDT

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X= ± 0.4
X.XX= ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA AMX. @20V (AC or DC)
6. CONTACT RESISTANCE: 10 MILLE-OHMS MAX.
7. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT



P.C. MOUNT PATTERN

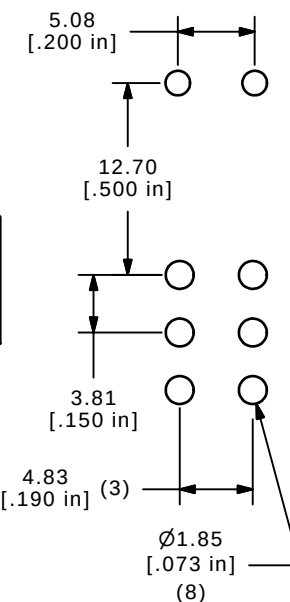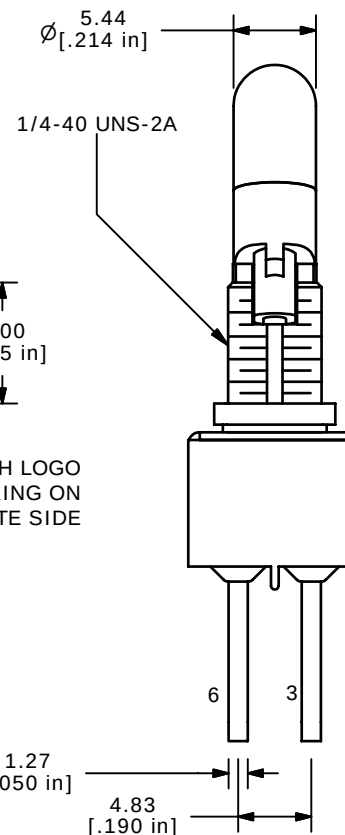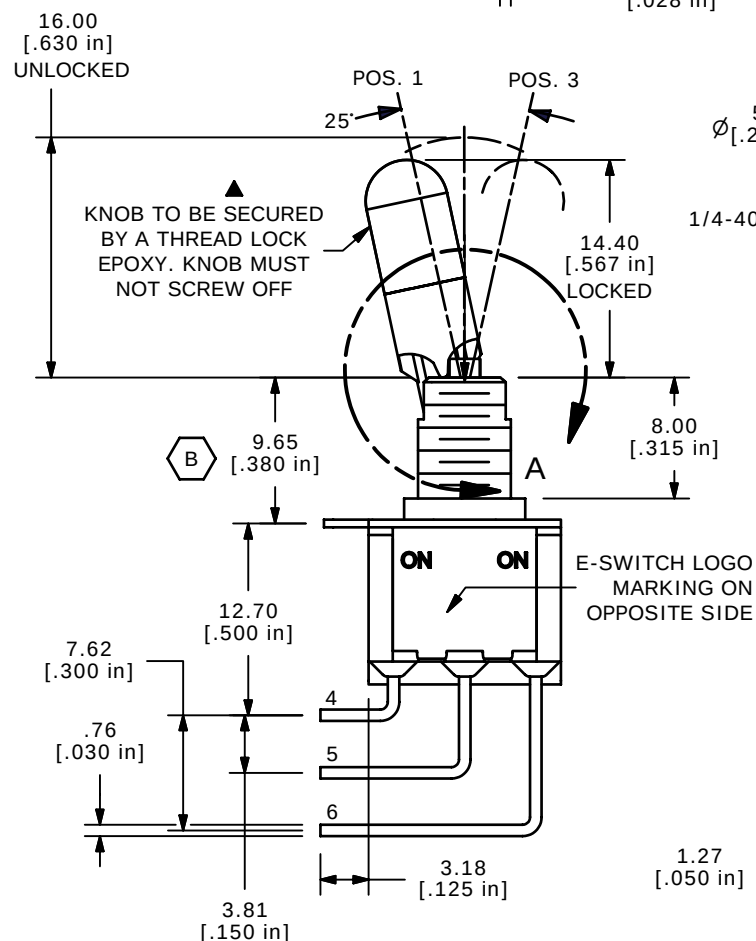

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100DP1K1B25M7RE

SCALE 2:1

DATE	12/18/2007
------	------------

DR	BLR
----	-----

DWG T121097

REV
B