

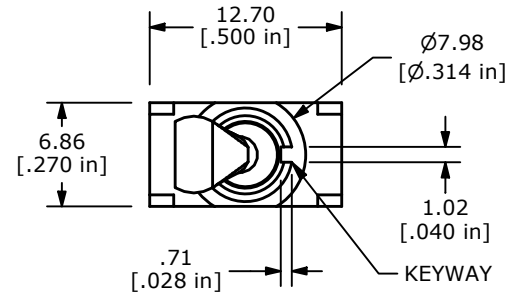
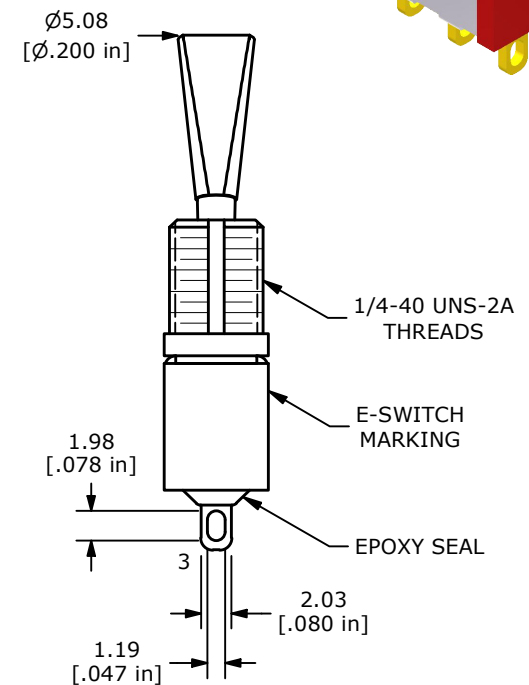


RECOMMENDED PANEL MOUNTING

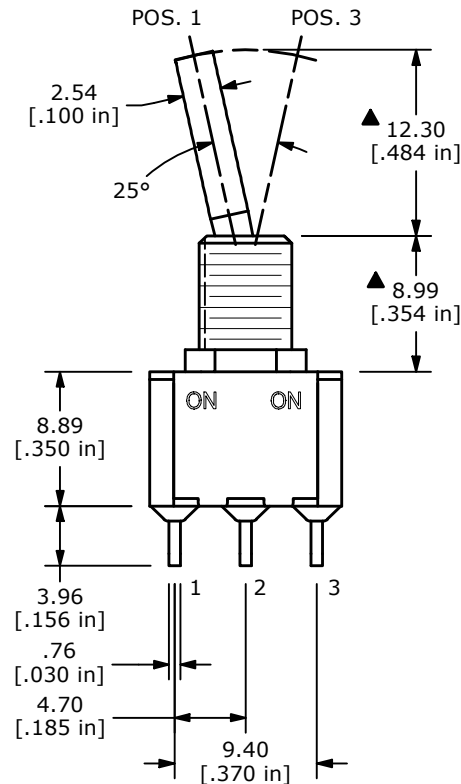

| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | NONE   | ON     |
| 2-3               | N/A    | 2-1    |



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
  3. TERMINAL NUMBERS FOR REF ONLY
  4. CONTACT MATERIAL: GOLD
  5. RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
  6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
  9. OPERATING TEMP.: -40°C TO 85°C
  10. ▲ DENOTES CRITICAL PARAMETER.
  11. HARDWARE TO BE SHIPPED BULK  
T100011 - LOCK WASHER - QTY 1  
T100015 - LOCK RING - QTY 1  
T100000 - HEX NUT - QTY 2

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | E-SWITCH®              |           |    |          | OBJECT ID |
|-----|------------|-------------------|----------|----|------------------------|-----------|----|----------|-----------|
| C   | ECO-102145 | 100 SERIES UPDATE | 08/16/23 | MR | TITLE 100SP1T6B11M1REH |           |    |          | 000022938 |
|     |            |                   |          |    | SCALE                  | DATE      | DR | DWG      | REV       |
|     |            |                   |          |    | 2:1                    | 11/7/2005 | PH | ST111070 | C         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED