

SPECIFICATIONS

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E98031):
10A 250VAC [cURus]

DIN/EN61058-1 (40003003):
10(3)A 250VAC T125 [VDE, ENEC10]

ELECTRICAL LIFE:
6,000 Cycles [cURus]

TEMPERATURE:
Operating: 65°C [cURus]
Operating: 125°C [VDE, ENEC10]

APPROVALS:

MATERIALS

BODY:
Polyamide 6/6 (PA66), 25% Glass Fiber

ACTUATOR:
Polyamide 6/6 (PA66), 25% Glass Fiber



SPRING:
Piano Wire
Copper

HARDWARE:
Brass

MOBILE CONTACTS:
Brass

CONTACTS:
Silver

TERMINALS:
Silver Plated Brass

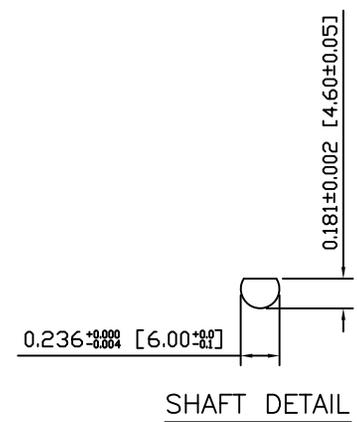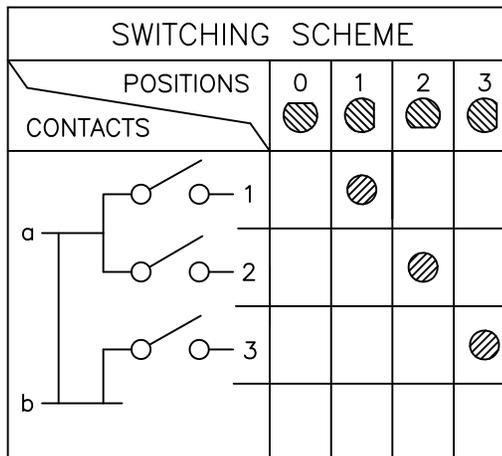

OBJECT ID: 00000134

240311	
TITLE	12-240311
SCALE	DRAWING NOT TO SCALE
DATE	3/10/2015
REVISION	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	INITIAL RELEASE	21800	3/10/15	MW
REV.	DESCRIPTION	PCR	DATE	DRAWN BY

SCALE: DRAWING NOT TO SCALE

ITEM NUMBER: 12-240311