
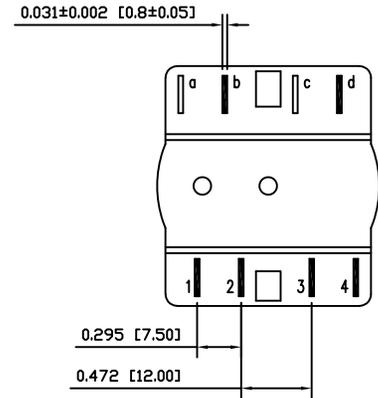


MOUNTING FOR SELF-TAPPING SCREW, 0.315 [8.0] MAX. DEPTH

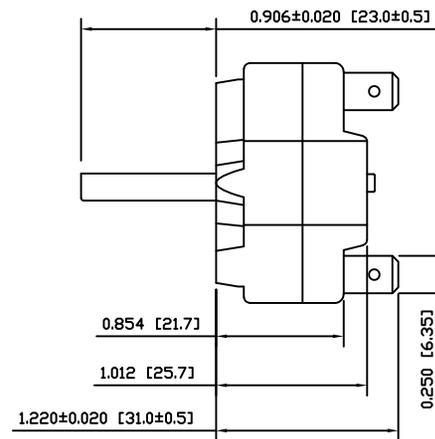

SPECIFICATIONS

RATINGS:
 ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E98031):
 16A 250VAC [cURus]
 1HP 120VAC [cURus]
 2HP 240VAC [cURus]

DIN/EN61058-1 (40003018):
 16(4)A 250V~ [VDE, ENEC10]
 10(2)A 400V~ [VDE, ENEC10]

ELECTRICAL LIFE:
 6,000 Cycles [cURus]

TEMPERATURE:
 Operating: 105°C [cURus]

MATERIALS

BODY:
 25% Glass Filled Polyamide 6/6 (PA66), UL94 V-0


ACTUATOR:
 25% Glass Filled Polyamide 6/6 (PA66), UL94 V-0

CONTACTS:
 Silver Alloy

TERMINALS:
 Silver Plated Copper

SCHEMATIC

POSITIONS	1	2	3	4	
CONTACTS	●	●	●	●	
①	●	●		●	VACUUM
②		●	●		RESTORE
③	●				MAINTENANCE
④	●	●	●		BRUSH



APPROVALS:



OBJECT ID: 00000136



420406

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	INITIAL RELEASE	21366	1/29/14	ERP
REV.	DESCRIPTION	PCR	DATE	DRAWN BY

DIMENSIONS	INCHES [MILLIMETERS]
GENERAL TOLERANCES	±0.008 [±0.2] / ±1'
SCALE	DRAWING NOT TO SCALE
PROJECTION	1st Angle

ITEM NUMBER	DATE	REVISION
12-420406	JANUARY 29, 2014	A