

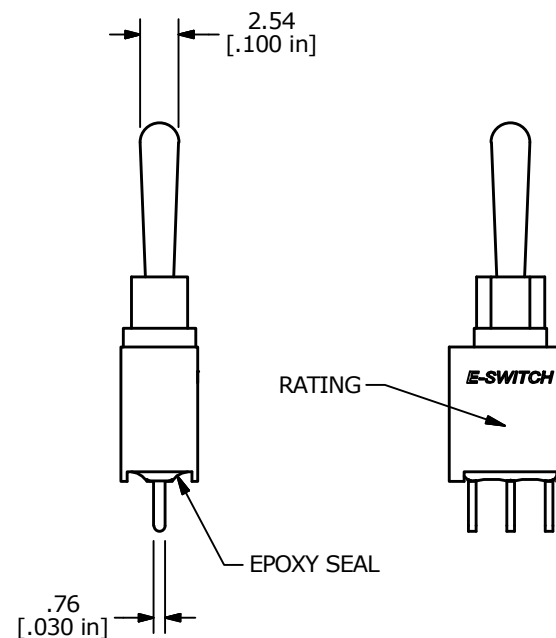


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

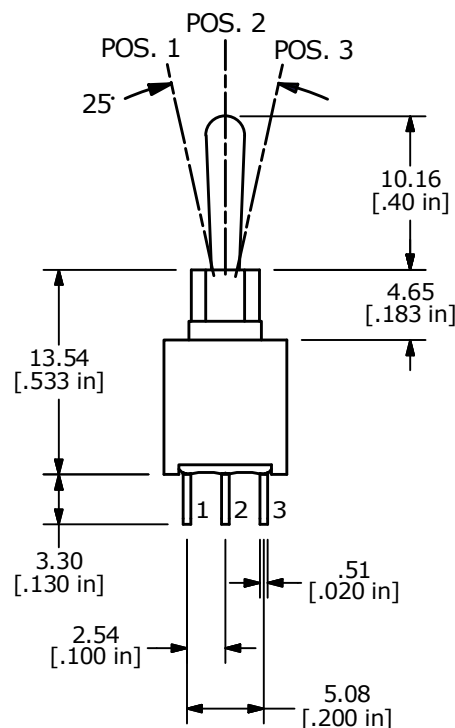

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  4. RATING: cURus 3A @120 VAC or 28VDC  
1A @250VAC
  - ▲ 5. FIXED TERM. & MOVING CONTACT:  
COPPER ALLOY W/SILVER PLATE OVER  
NICKEL PLATE
  6. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
  7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
  9. OPERATING TEMP.: -30°C to 85°C
  10. ▲ DENOTES CRITICAL PARAMETER.



F	23558	drawing redrawn and updated	9/12/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 200AWMSP3T1A1M2QE				
SCALE 2:1	DATE 5/31/2002	DR rc	DWG T201206	REV F

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED