
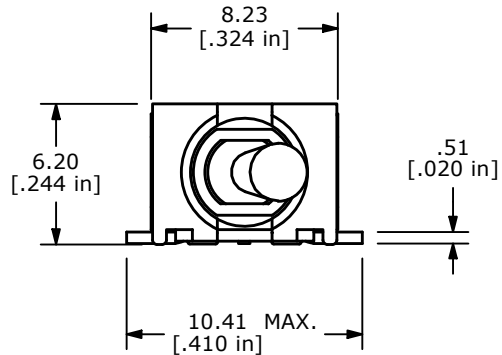
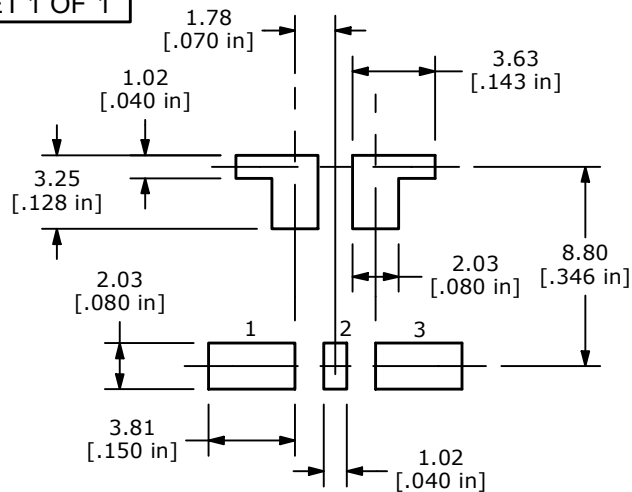




▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- TERMINAL NUMBERS FOR REF. ONLY
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25

- CONTACT PLATING: SILVER
TERMINAL PLATING: GOLD FLASH OVER SILVER
- RATING: 1A @ 250VAC, 3A @ 120VAC or 28VDC
- CONTACT RESISTANCE: 20 MILLI-OHMS MAX.
- ELECTRICAL LIFE: 6,000 MAKE AND BREAK CYCLES AT FULL LOAD
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
- OPERATING TEMPERATURE: -30°C to 85°C
- PACKAGING: 500 PER REEL
- ▲ DENOTES CRITICAL PARAMETER.

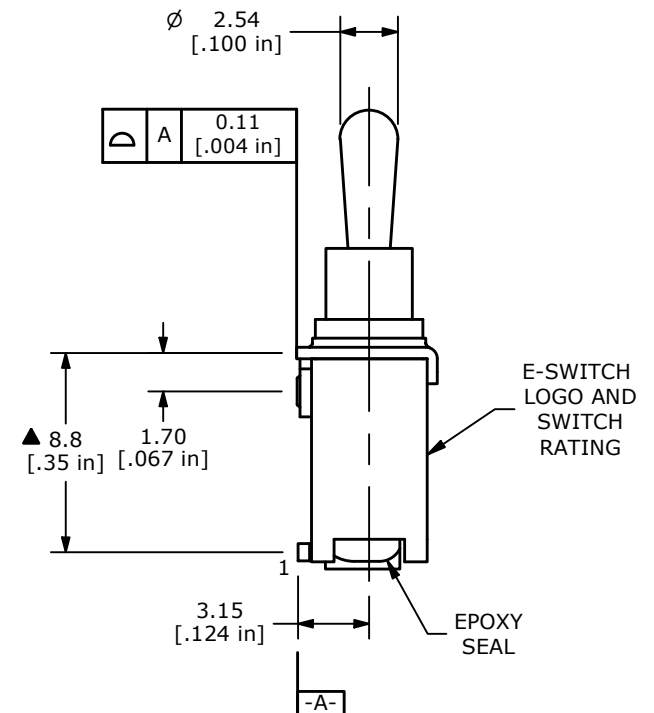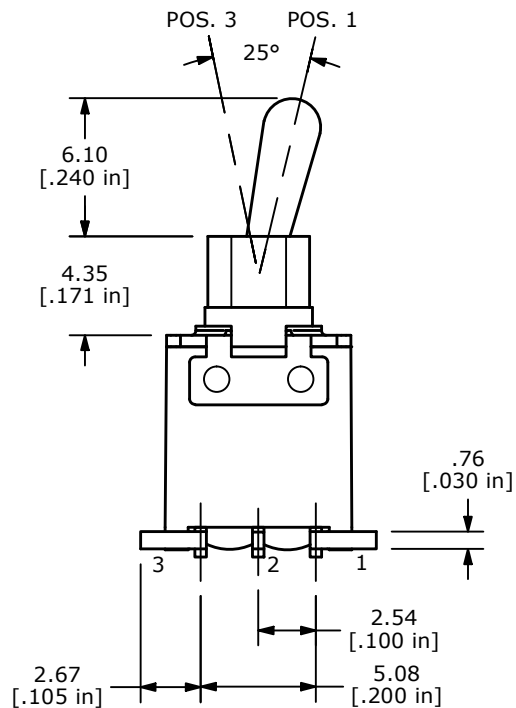

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103770	print update	11/14/25	MW	TITLE 200BWMSP1T2A1SM6QE				000025948
					SCALE 3:1	DATE 7/19/2004	DR AR	DWG T833041	REV B
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									