


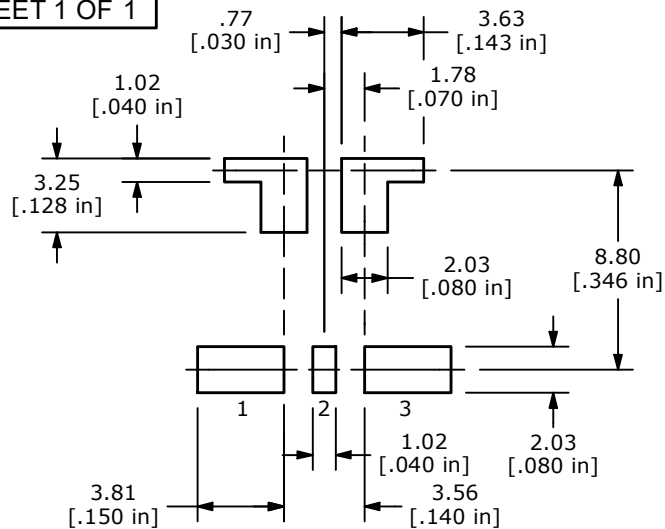


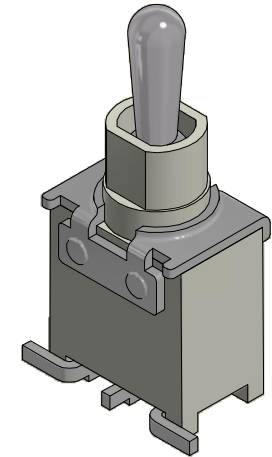

RECOMMENDED PCB LAYOUT


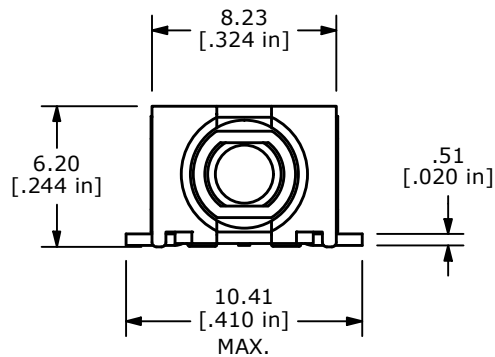


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- ▲ 4. PLATING MATERIAL: SILVER PLATED
5. . CONTACT RATING: 1 AMP @ 250 VAC
3 AMPS @ 120 VAC or 28 VDC
6. CONTACT RESISTANCE: 20 MILLI-OHMS MAX.
7. MECHANICAL LIFE: 30,000 MAKE AND BREAK CYCLES AT FULL LOAD
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS@ SEA LEVEL
10. OPERATING TEMPERATURE: -30°C to 85°C
11. PACKAGING: 500 PER REEL.
12. ▲ DENOTES CRITICAL PARAMETER.

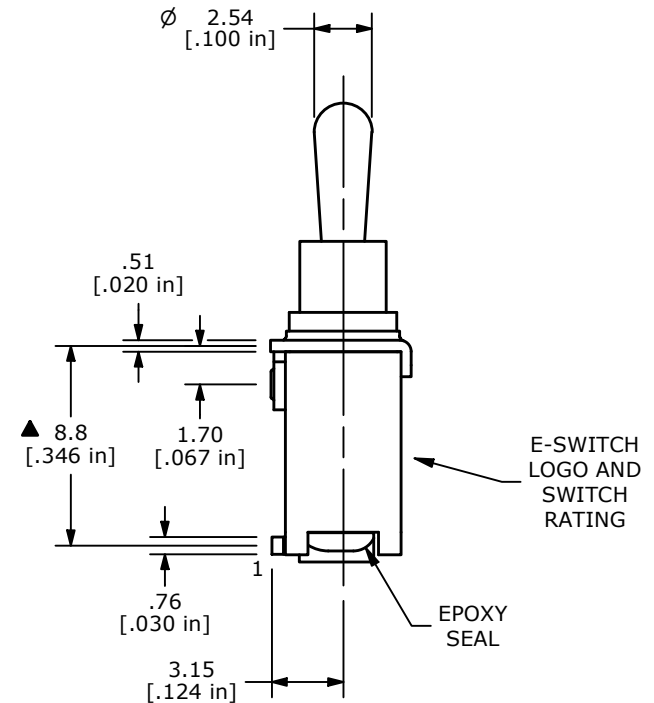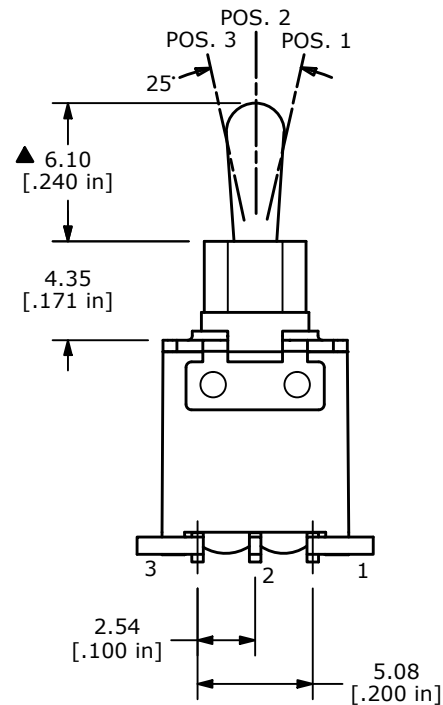

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103407	Release	05/02/25	MW	TITLE 200BWMSP3T2A1SM6QE				100130242
					SCALE	DATE	DR	DWG	REV
					3:1	5/1/2025	MW	T833055	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED