




| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| ON                | NONE   | ON     |
| 2-3               | N/A    | 2-1    |

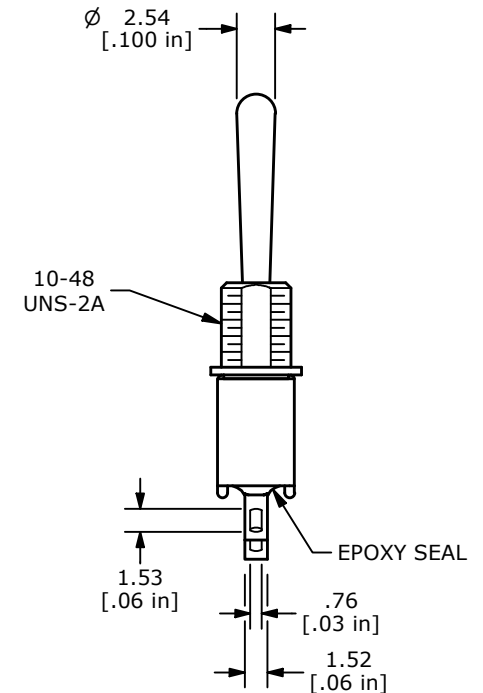

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. TERMINALS/CONTACT MATERIAL: SILVER PLATED
5. RATING: 3A @ 120VAC or 28VDC  
1A @ 250VAC
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000M OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE TO BE SHIPPED BULK  
T200001 - HEXNUT - QTY 2  
T200000 - LOCKWASHER - QTY 1  
T200002 - LOCKRING - QTY 1

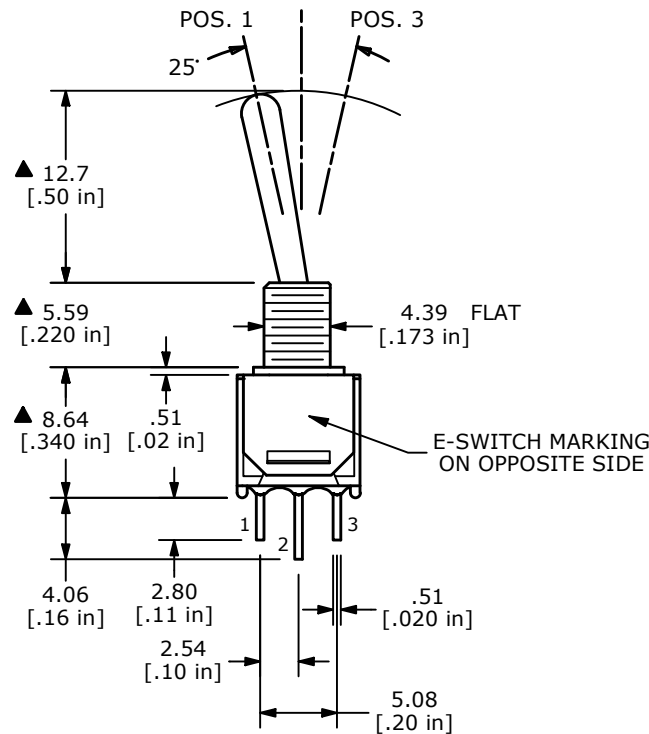

| REV                                                                                                          | ECO NO     | DESCRIPTION | DATE     | BY | E-SWITCH®              |                |       |              | OBJECT ID |
|--------------------------------------------------------------------------------------------------------------|------------|-------------|----------|----|------------------------|----------------|-------|--------------|-----------|
| A                                                                                                            | ECO-102866 | Release     | 07/18/24 | MW | TITLE 200MSP1T4B1M1QEH |                |       |              | 100127860 |
|                                                                                                              |            |             |          |    | SCALE 2:1              | DATE 7/16/2024 | DR MW | DWG ST211066 | REV A     |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |             |          |    |                        |                |       |              |           |