




▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1



() = MOMENTARY

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 3 AMPS @ 120VAC or 28VDC UL, CUL
1 AMPS @ 250VAC UL, CUL
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. HARDWARE INCLUDED: T200001 - HEXNUT (2)
T200000 - LOCKWASHER (1)
T200002 - LOCKRING (1)

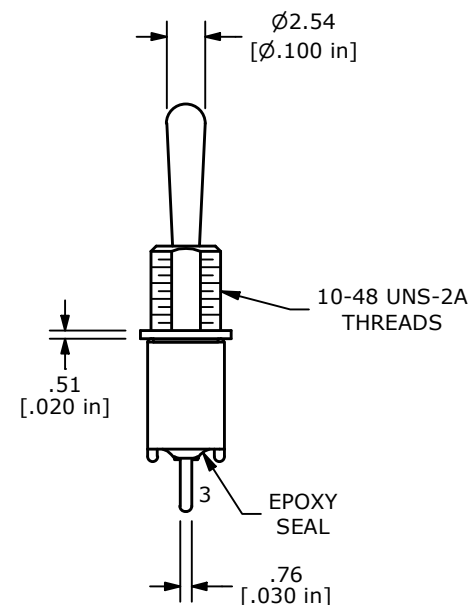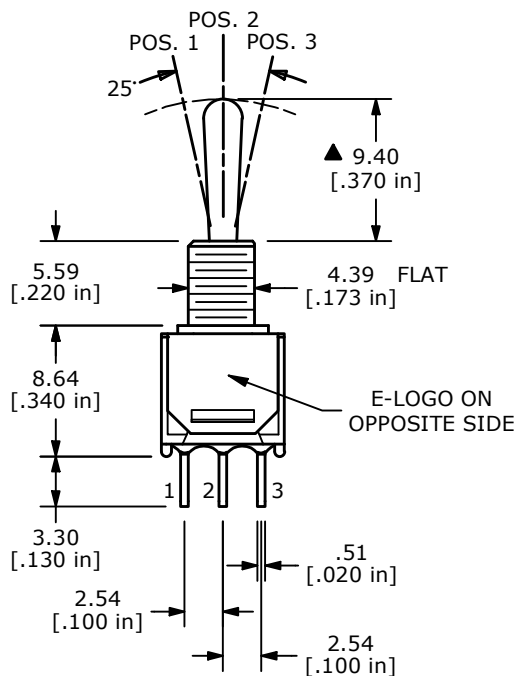

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103486	Release	06/25/25	MW



OBJECT ID
100130466

TITLE 200MSP4T1B1M2QE#				
SCALE 2:1	DATE 6/16/2025	DR MW	DWG ST211083	REV A