


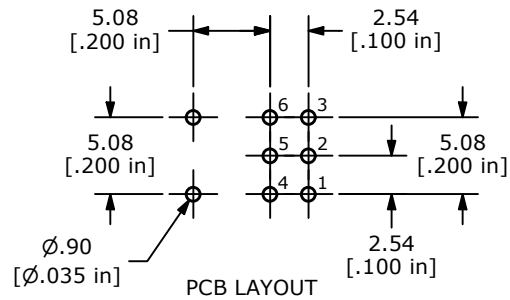


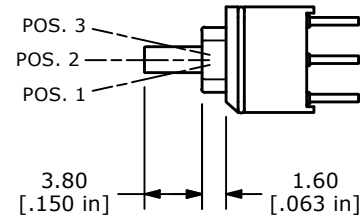


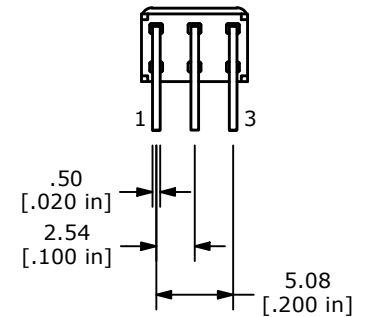

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4

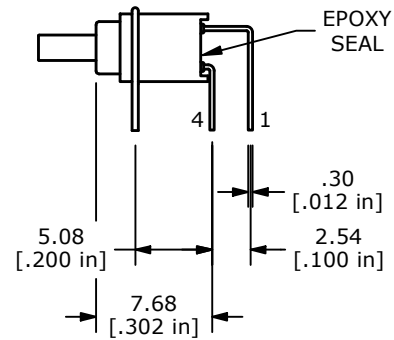

▲ CIRCUIT: DPDT
ON-OFF-ON

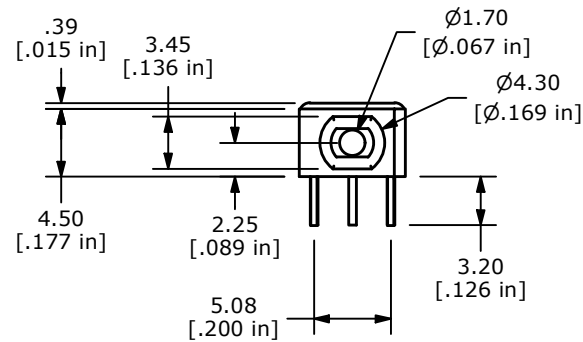

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACTS/TERMINALS: GOLD PLATED
5. RATING: 0.4 VA max. @ 20V AC or DC Max.
6. CONTACT RESISTANCE: 100m OHM Max.
7. ELECTRICAL LIFE: 6,000 CYCLES
8. MECHANICAL LIFE: 40,000 CYCLES
9. INSULATION RESISTANCE: 500M OHM min.
10. DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL
11. OPERATING TEMP.: -30°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. SEAL RATING: IP67

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID	
A	ECO-102803	Release	06/17/24	MW						100127631	
					TITLE 200UDP3T1A1M6RE						
					SCALE 2:1		DATE 6/12/2024		DR MW	DWG T250014	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											REV A