


SHEET 1 OF 1

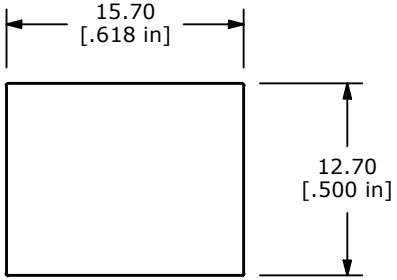


RECOMMENDED PANEL MOUNTING
1.19mm TO 3.18mm THK

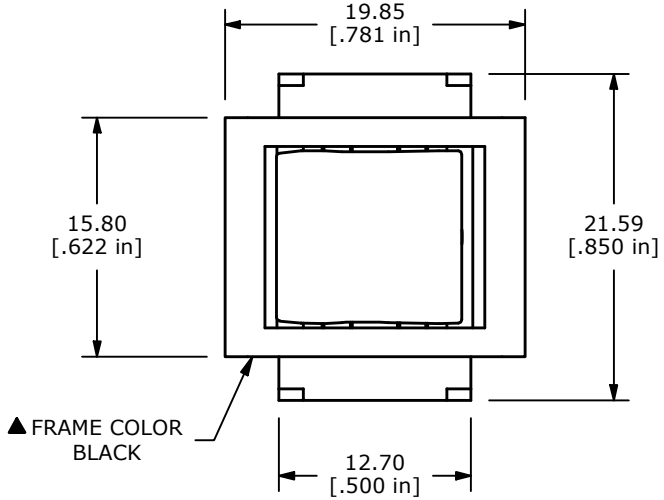


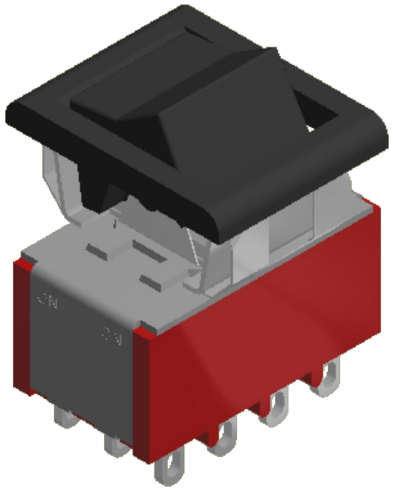


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3, 5-6, 8-9, 11-2	N/A	2-1, 5-4, 8-7, 11-10

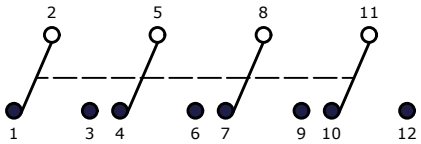

CIRCUIT: 4PDT

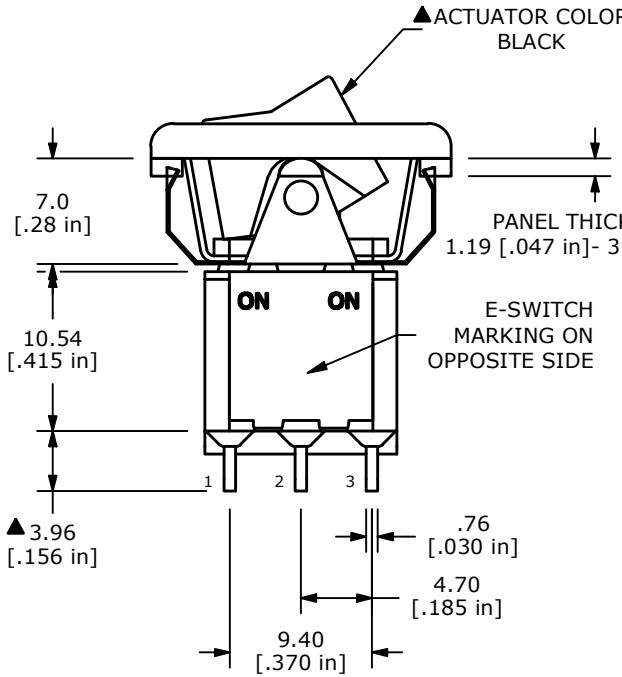

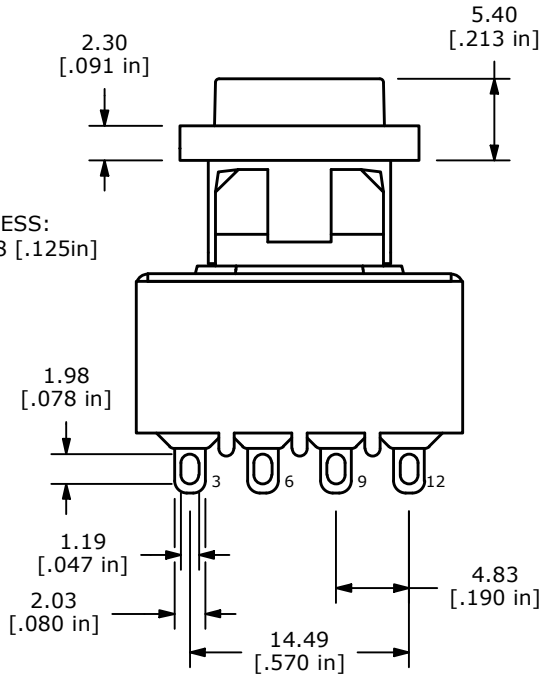

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. ▲PLATING MATERIAL: SILVER
5. RATING: 5A @ 120VAC OR 28VDC
   2A @ 250 VAC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
E	ECO-103421	UPDATE AND REDRAWN	05/14/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000025307

TITLE 3004P1R6BLKM1QEBLK

SCALE	DATE	DR	DWG	REV
2:1	5/31/2002	CB	T346003	E