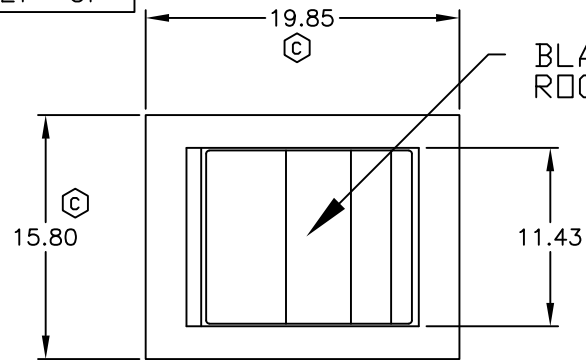
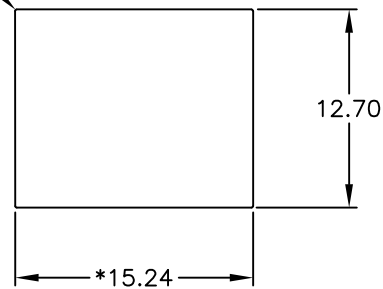



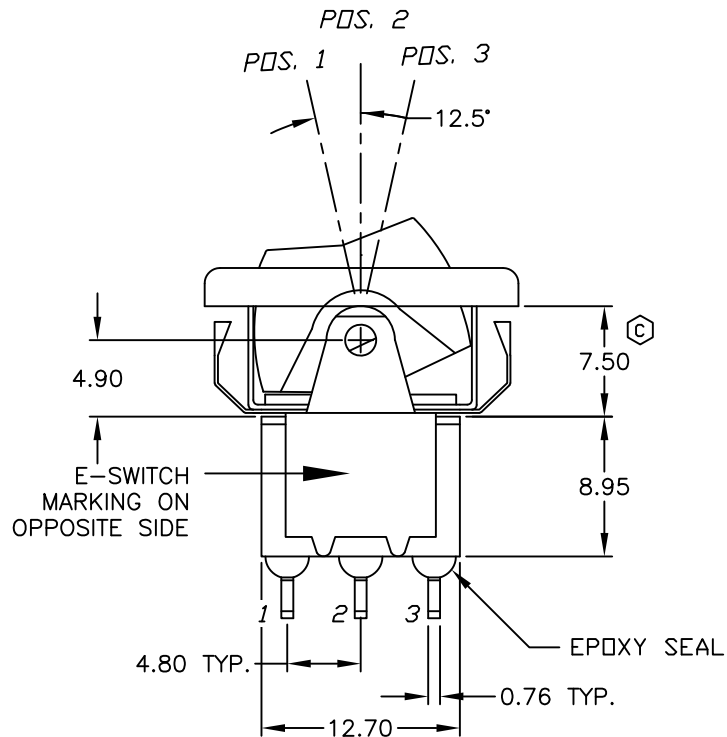
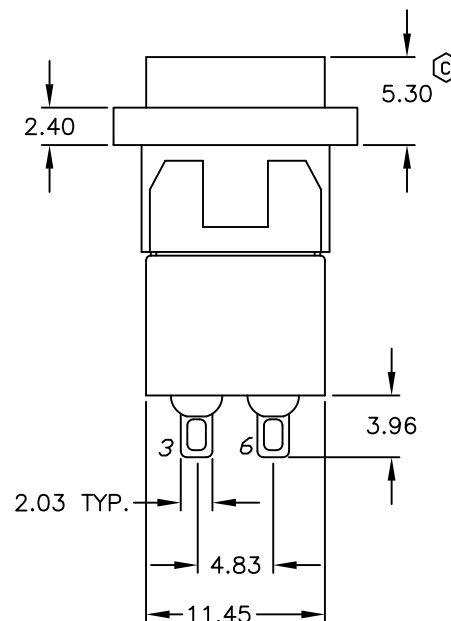
R. 0.13
(4 PL)

BLACK BEZEL

RECOMMENDED PANEL MOUNTINGPANEL THICKNESS

1.52 TO 3.18

▲ * DIMENSION IS 15.75/15.88
FOR PANEL THICKNESS BETWEEN
1.52mm TO 3.18mm

CIRCUIT: DPDTSWITCH FUNCTION

POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC OR 28VDC
2A @250VAC
- MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
- CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
- ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C

C	18370	REVISED 4 DIMENSIONS	12/31/08	BLR
B	12120	REVISED DESC/ PER CATALOG	5/6/02	CB
A	10538	RELEASED FOR PRODUCTION	2/17/00	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

P:\EEngineering\STW\BARDON\BARDON\Logo Etch\B\Map

TITLE

300 DP-3 R6 BLK M1 Q E BLK

SCALE

2:1

DATE

2/17/00

DR

MM

DWG

T323002

REV

C