
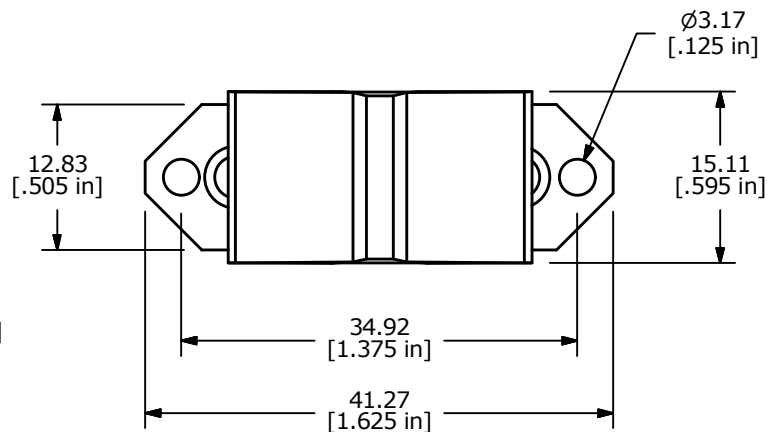
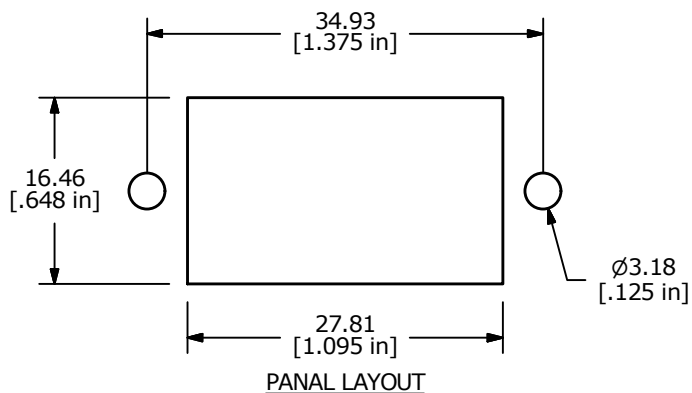


ISOMETRIC



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

MOMENTARY=(ON)



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA max. @20VAC OR DC max.
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

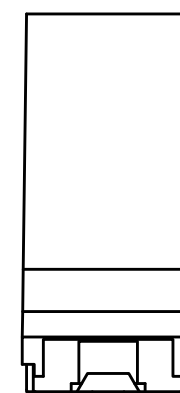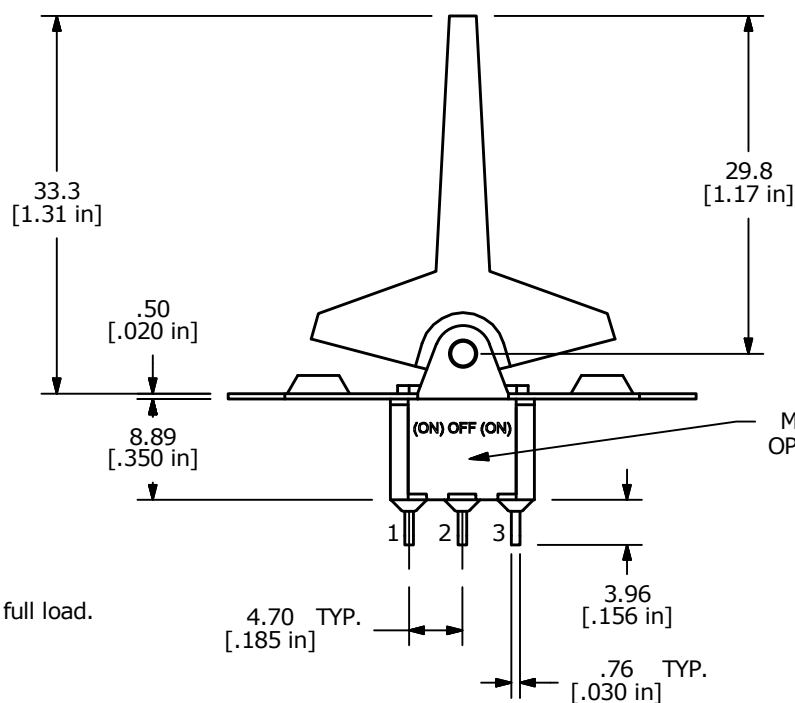

D	15309	DIM TO 22.56 FROM 22.80	9/21/05	PH
C	15215	CORRECTED NOTES 5,6 AND REV. A PCR#	8/30/05	PH
B	15059	CORRECTED PANEL LAYOUT	7/7/05	JB
A	14970	RELEASED FOR PRODUCTION	6/16/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

TITLE 300SP4R4BLKM1RE

SCALE 1.5:1

DATE 6/16/2005

DR JB

DWG T305000

REV D