

**SPECIFICATIONS**

FUNCTION:  
2P1T OFF-(ON)

RATINGS:  
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):  
17A 125VAC [cURus]  
12A 250VAC [cURus]

ELECTRICAL LIFE:  
6,000 Cycles [cURus]

TEMPERATURE:  
Operating: 0°C to 65°C [cURus]

APPROVALS:



A

A

B



B

C

C

D

D

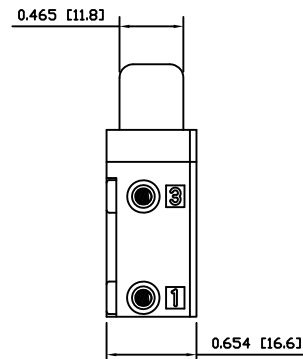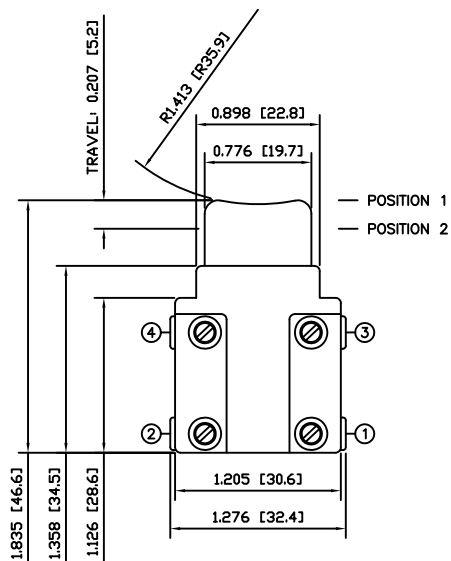


**COLORS**

BODY:  
White

ACTUATOR:  
Black

LOCK:  
None

**SCHEMATIC**



BODY	A	11/01/18	CAB
COLORS	A	11/01/18	CAB
SPECIFICATIONS	A	11/01/18	CAB
REFERENCE	REV.	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

INITIAL RELEASE	19594	11/01/18	CAB
DESCRIPTION	PCR	DATE	DRAWN BY

DIMENSIONS	INCHES [MILLIMETERS]
GENERAL TOLERANCES	±0.008 [±0.2] / ±1°
SCALE	DRAWING NOT TO SCALE

HY37-6E6-011-000		
ITEM NUMBER	DATE	REVISION
34-HY376E6011000	JANUARY 18, 2011	A