





RECOMMENDED P.C.B. LAYOUT

CIRCUIT: DPDT
CONTACT CONFIGURATION


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 3A @120VAC or 28VDC.
1A @250VAC.
- FIXED TERM/MOVING CONTACT
COPPER ALLOY W/SILVER PLATING
- ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
- INSULATION RESISTANCE: 1000M OHM TYPICAL
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
- OPERATING TEMP.: -30°C to +85°C

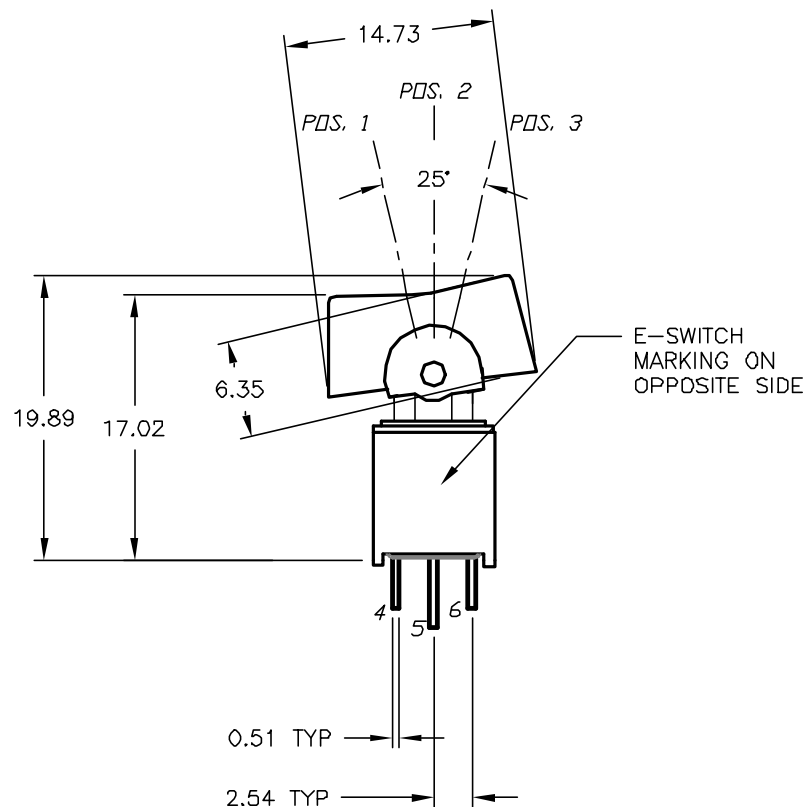

BOTTOM VIEW

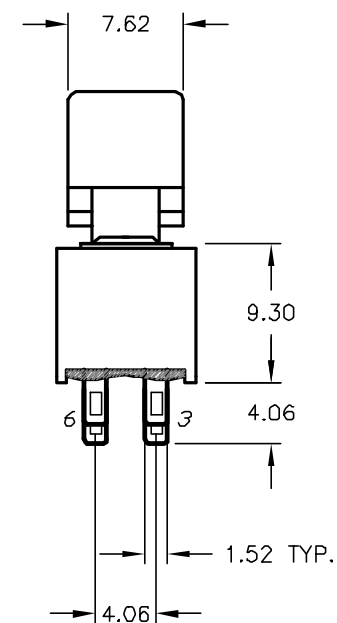

B	12664	REVISED NOTE 4	12/26/02	CB
A	12081	RELEASED FOR PRODUCTION	4/22/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

400A WMDP-3 R1 M1 QE

SCALE

2:1

DATE

4/22/02

DR

CB

DWG

T403007

REV

B