
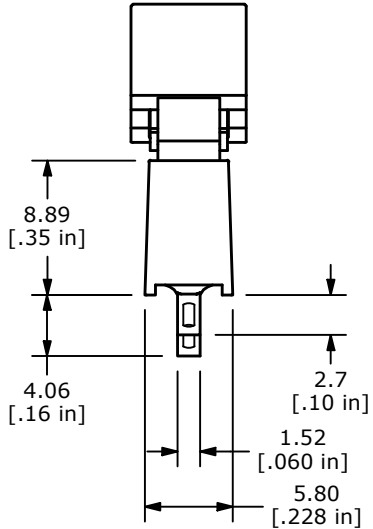
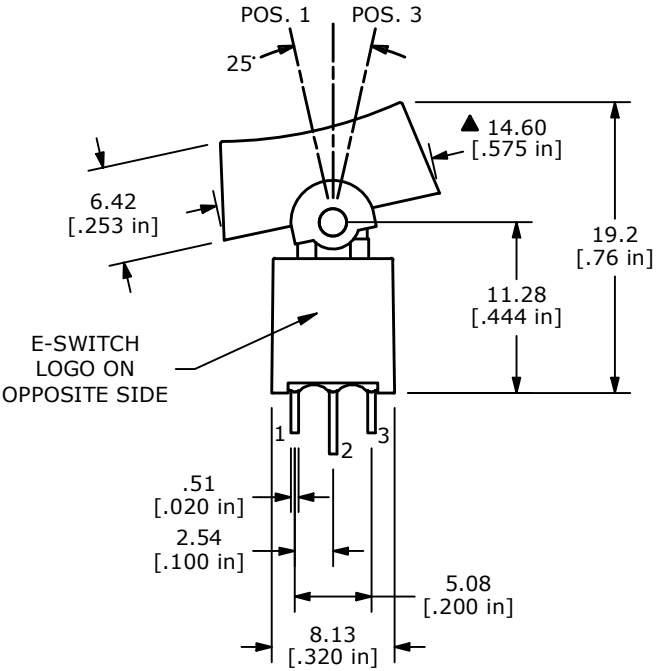


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1



- NOTE:
- 1. ALL DIMENSIONS IN MM [INCH]
 - 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 - 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲ 4. PLATING MATERIAL: SILVER
 - 5. RATING: 3 AMPS @ 120VAC or 28VDC
1 AMPS @ 250VAC
 - 6. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
 - 7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - 8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
 - 9. OPERATING TEMP.: -30°C to 85°C
 - 10. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102268	Housing width to 5.80mm	10/26/23	MW	TITLE 400AWMSP1R1REDM1QE				000025389
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 9/18/2008	DR AR	DWG T403023	REV B