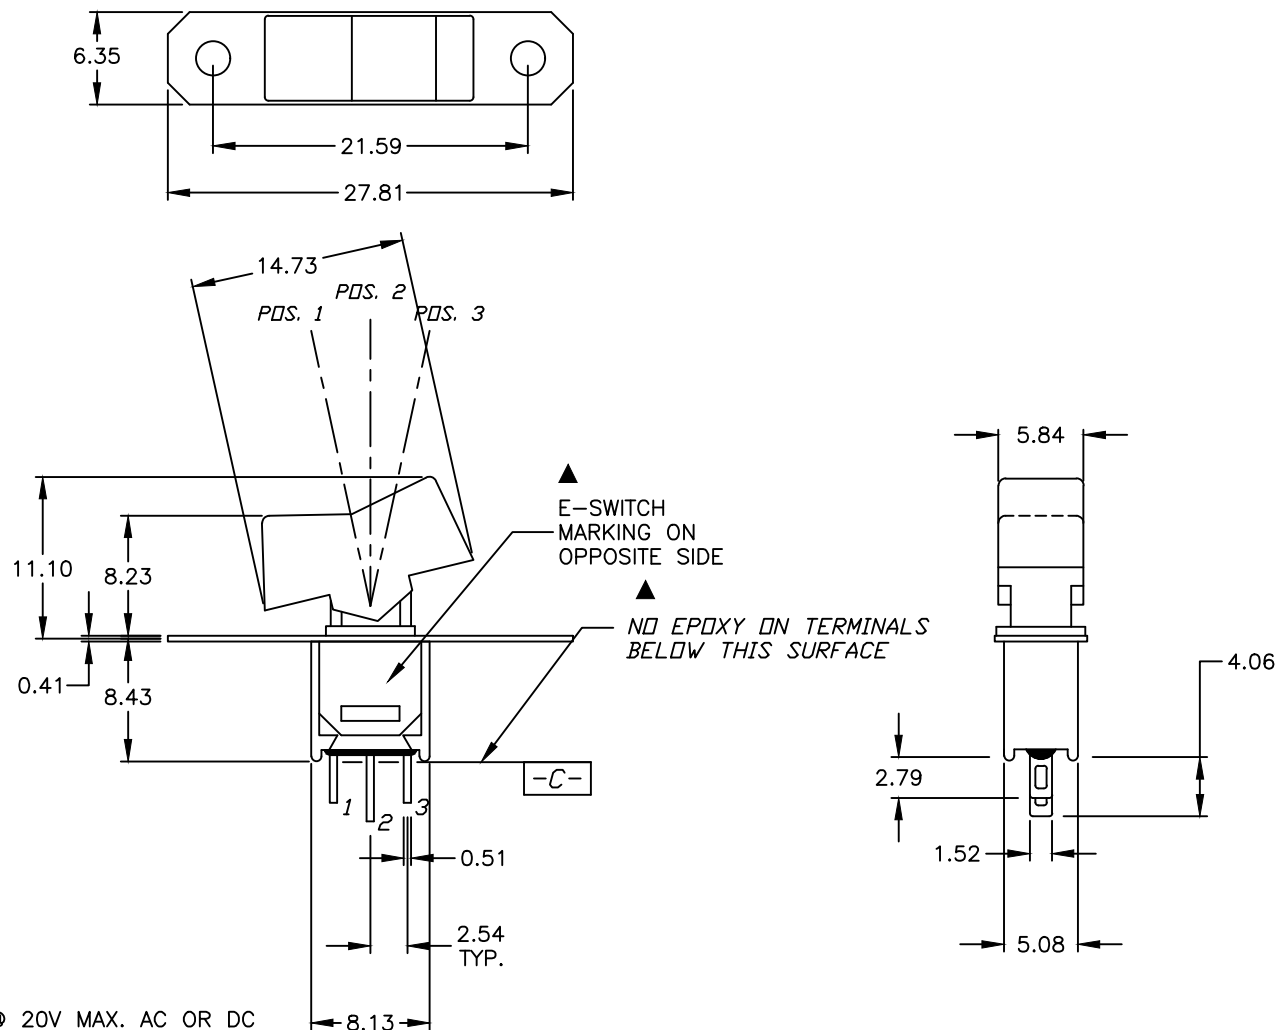


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3	OPEN	2-1

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- TERM. NOS. FOR REF. ONLY
- CONTACT RATING: 0.4 VOLT-AMPS MAX. @ 20V MAX. AC OR DC
- FIXED TERMINAL & MOVING CONTACT:
▲ COPPER ALLOY W/GOLD PLATE OVER NICKEL PLATE
- ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 M ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to +85°C
- ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

TITLE

400MSP1R6BLKM1RE

SCALE

2:1

DATE

4/30/04

DR

AR

DWG

T411000

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED