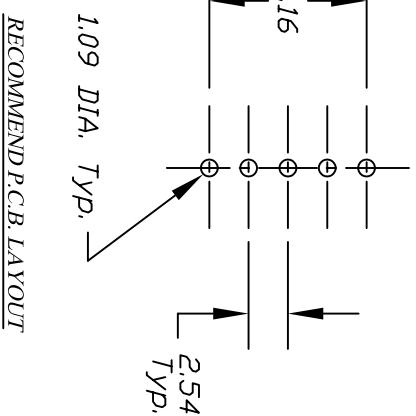
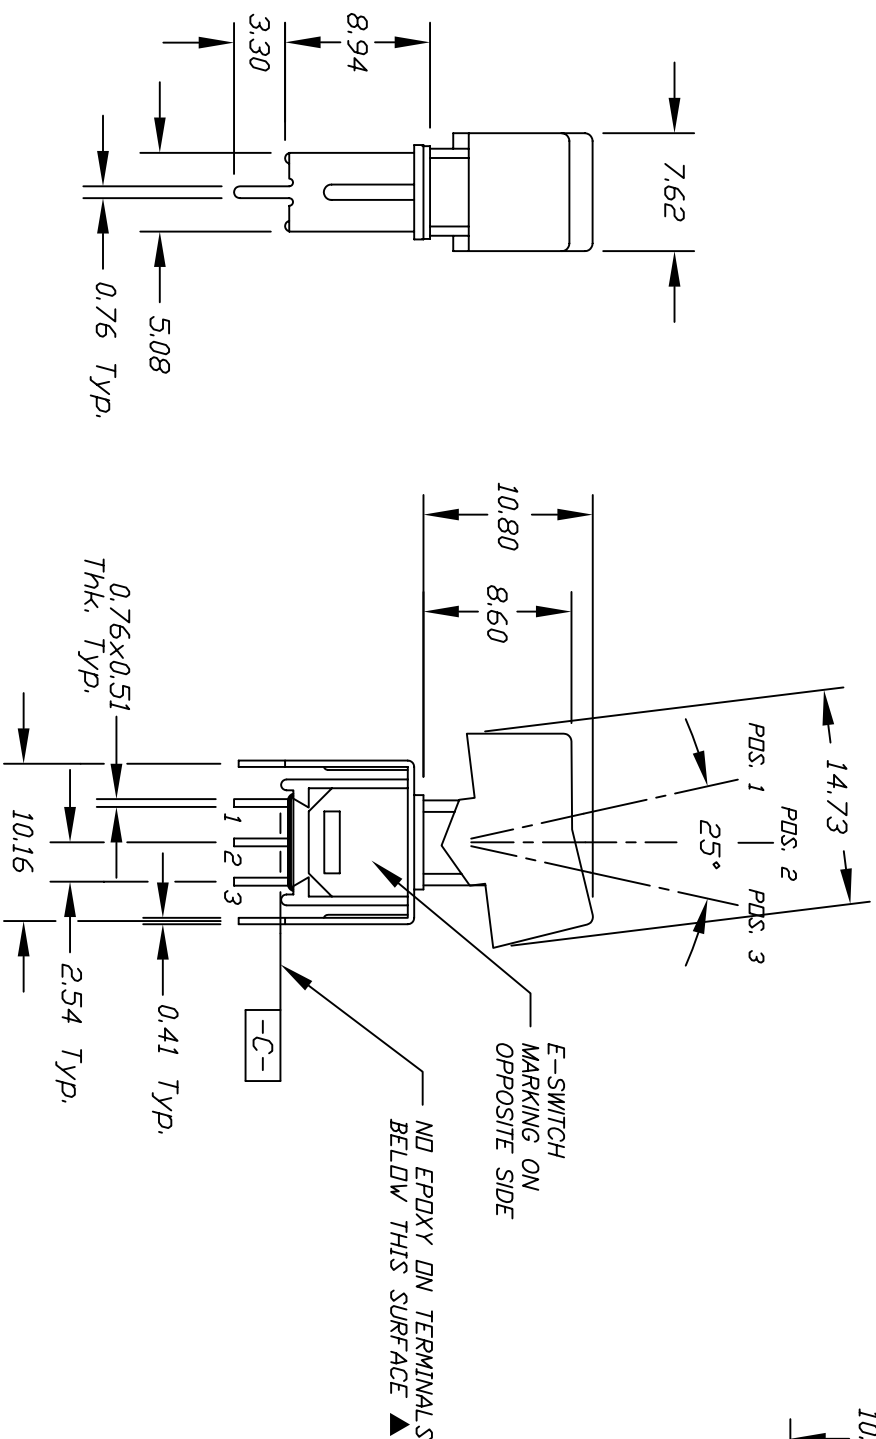


CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	OFF	DN	
2-3	DPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
3. RATING: 3 Amps @120VAC or 28VDC; 1.5 Amp @250VAC.
4. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
5. INSULATION RESISTANCE: 1,000M Ohms min.
6. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
7. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

TITLE			
400 MSP-3 R1 VS2 Q E			
A	10562	RELEASED FOR PRODUCTION	3/8/00
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
MM			
CHKD			
SCALE			
2:1			
DATE			
3/8/00			
DR			
MM			
DWG			
T413001			
REV			
A			