
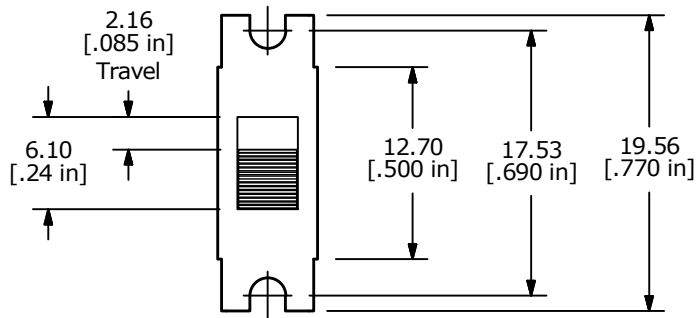
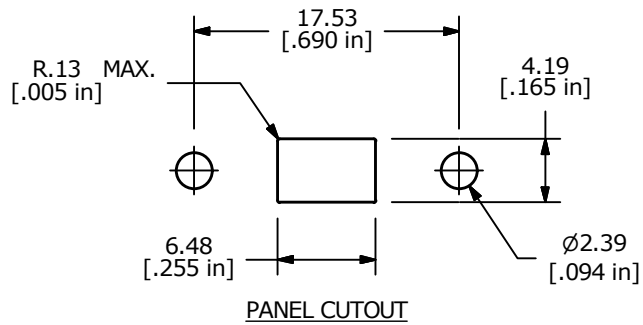
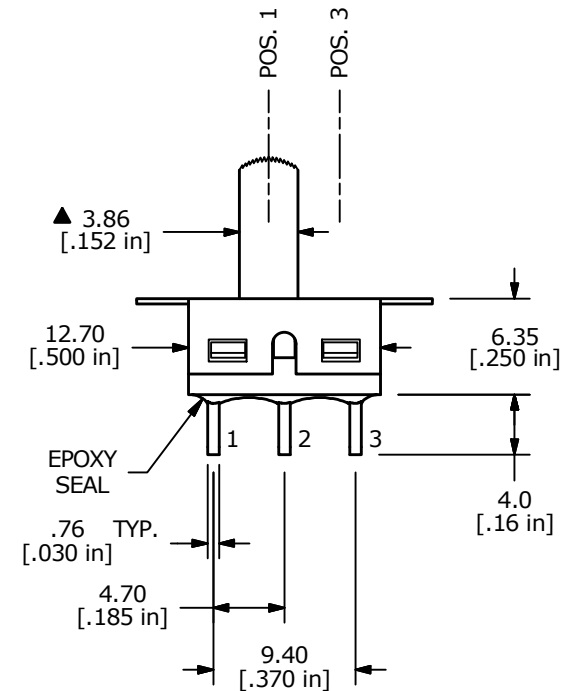
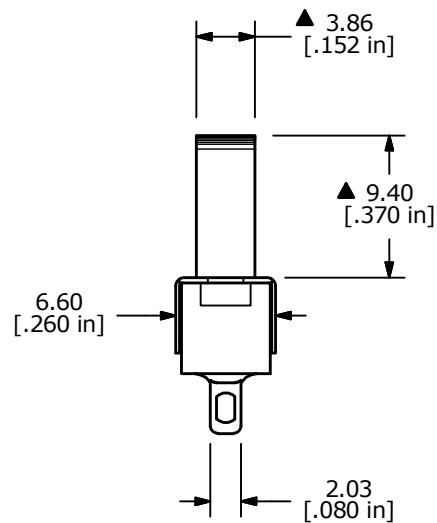


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	(ON)
2-1	N/A	2-3

(ON) = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. CONTACT RATING: 5A @120VAC or 28VDC, 2A @250VAC
6. ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. CONTACT RESISTANCE: 10m OHM MAX INITIAL @ 2-4VDC



E SWITCH®

A	23531	CREATE	8/21/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE	500SSP2S3M1QEB
-------	----------------

SCALE
2:1

DATE	8/21/2018
------	-----------

DR	MW
----	----

DWG	T511070
-----	---------

REV
A