


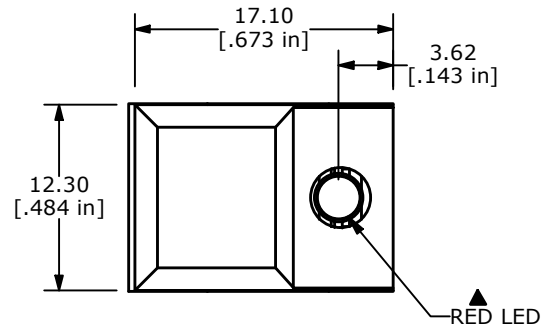

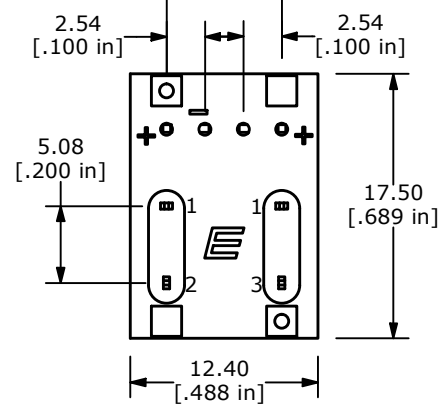
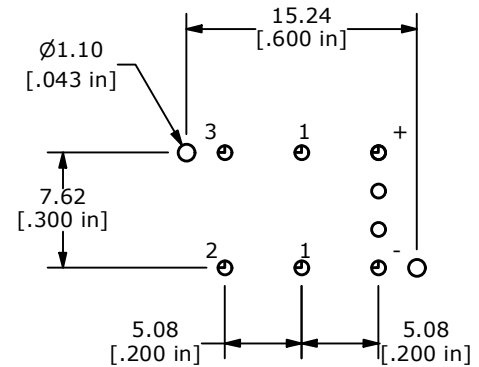


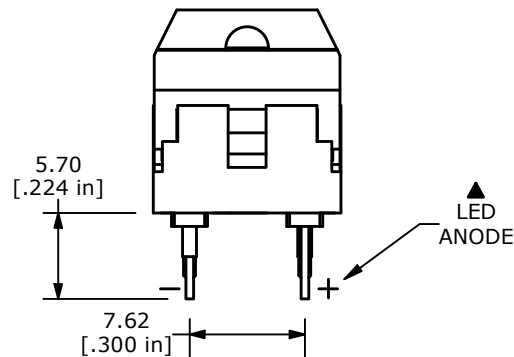

RED LED

PARAMETERS	SYMBOL	MAX. MIN.	TYP.	UNITS
POWER DISSIPATION	P_D	80 --		mW
FORWARD VOLTAGE	V_F	2.8 1.9	2.2	V
REVERSE VOLTAGE	V_R	5		V
EMISSION WAVELENGTH	λ_P		695	nm
AVE. FORWARD CURRENT	I_{AF}	30 --		mA
LUMINOUS INTENSITY	I_v	0.7	22	mcd

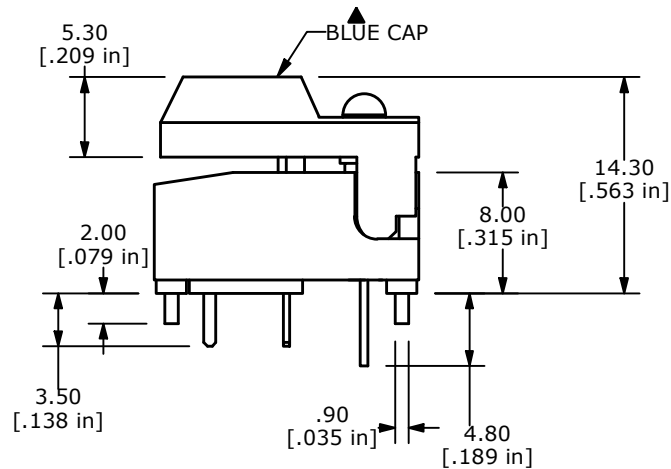

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATINGS: 12mA @ 12VDC
5. CONTACTS: FIXED AND MOVING:
COPPER ALLOY W/GOLD PLATE
6. OPERATING FORCE: 170 +/- 50 grams
7. OPERATING TRAVEL: 2.5MM ± 0.5MM
8. ▲ DENOTES CRITICAL PARAMETER.
9. OPERATING LIFE: 500,000 CYCLES MIN.
10. CONTACT RESISTANCE: 500HMS MAX (INITIAL)
11. INSULATING RESISTANCE: 100M OHM MIN
12. OPERATING TEMP.: -10°C TO 60°C



E-SWITCH®

B	21681	RECREATED IN INVENTOR	10/24/14	AS
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 5501M41

SCALE 1:1

DATE 10/24/2014

DR AS

DWG XR0170P

REV B