

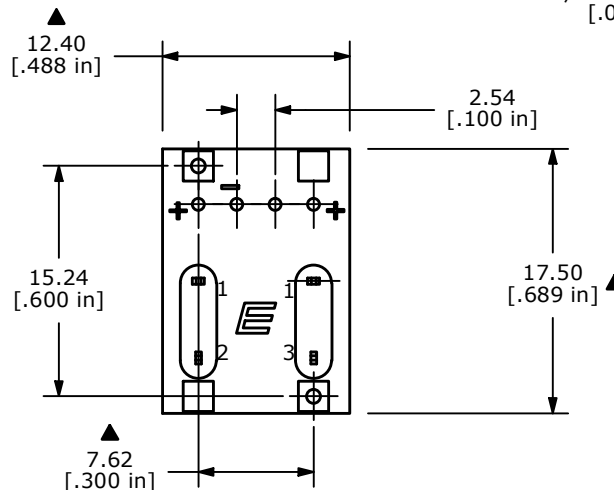
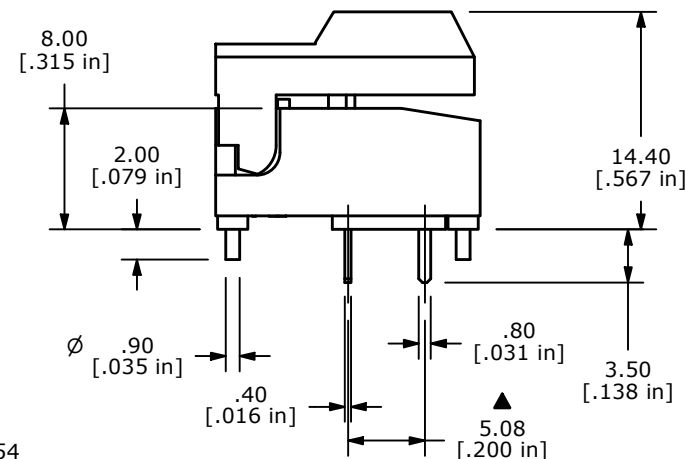


ISOMETRIC

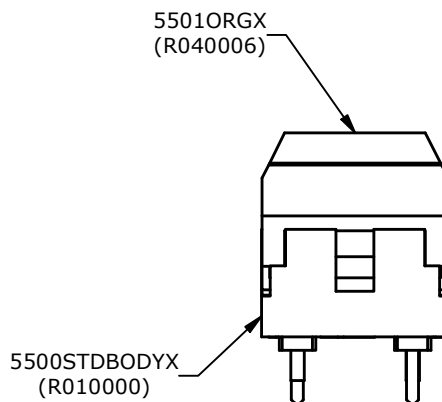

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERMINAL NUMBERS FOR REF. ONLY.
  - ▲ 4. RATING: 12mA @ 14VDC  $\square$
  5. CONTACT RESISTANCE: 50m $\Omega$  MAX
  6. INSULATION RESISTANCE: 100M $\Omega$  MIN  $\square$
  7. CONTACTS: FIXED AND MOVING:  $\square$   
COPPER ALLOY W/GOLD PLATE
  8. OPERATING FORCE: 170± 50 GRAMS  $\square$
  9. OPERATING TRAVEL: 2.5± 0.5  $\square$
  10. MECHANICAL LIFE: 500,000 CYCLES
  11. OPERATING TEMPERATURE: -10°C TO 60°C  $\square$
  12. ▲ DENOTES CRITICAL PARAMETER



B	21668	UPDATED AND ADDED NOTES	10/24/14	AS
A	18611	Released For Production	8/26/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 5501M6X				
SCALE 2:1	DATE 8/26/2009	DR BLR	DWG XR0248P	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED