

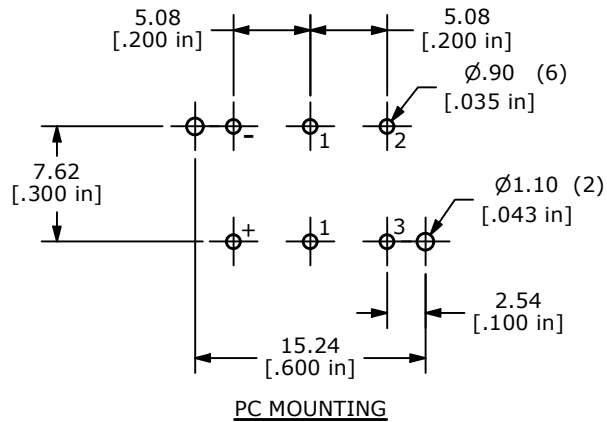
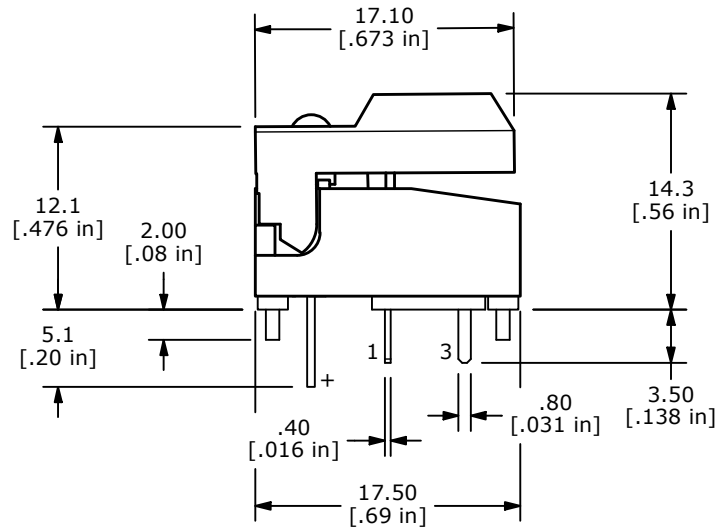
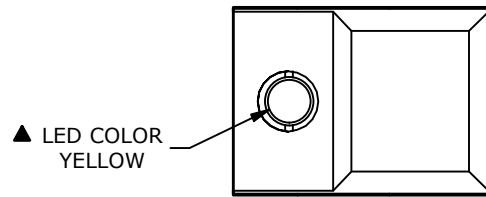


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATINGS: 30mA @ 12VDC
5. CONTACTS: FIXED AND MOVING:
COPPER ALLOY W/GOLD PLATE
6. OPERATING LIFE: 500,000 CYCLES
7. CONTACT RESISTANCE: 50M OHM MAX (INITIAL)
8. OPERATING FORCE: 150 ± 50 gf
9. OPERATING TRAVEL: 2.5 ± 0.5 mm
10. ▲ DENOTES CRITICAL PARAMETER.
11. INSULATION RESISTANCE: 100M OHMS
12. OPERATING TEMP.: -10°C to 60°C

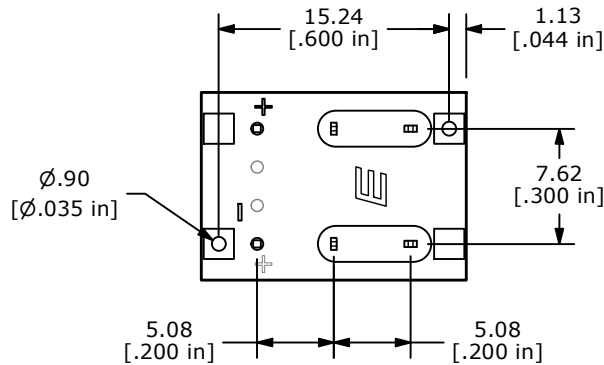

▲ ACTUATOR
COLOR: GRAY

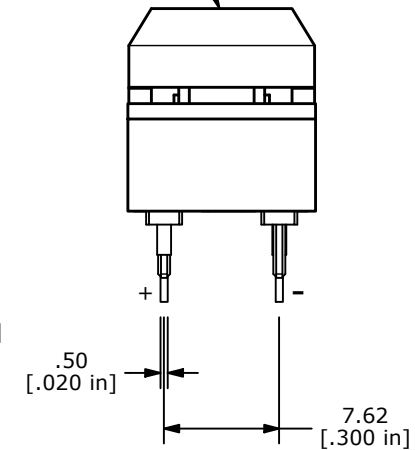

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	30 MAX
FORWARD VOLTAGE	V	1.8 - 2.8
LUMINOUS INTENSITY	mcd	12 TYP

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®		OBJECT ID	
A	ECO-103390	Release	04/30/25	MW	TITLE 5501MGRYYEL		100130202	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	REV
					2:1	4/23/2025	MW	A
					DWG		XR0256P	