
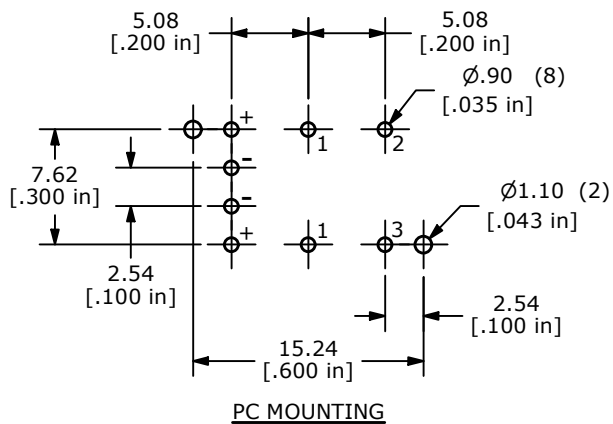
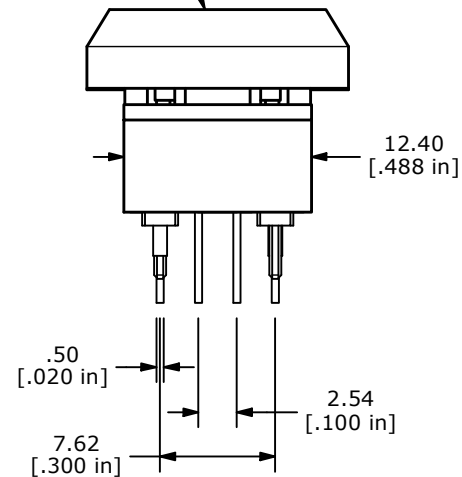
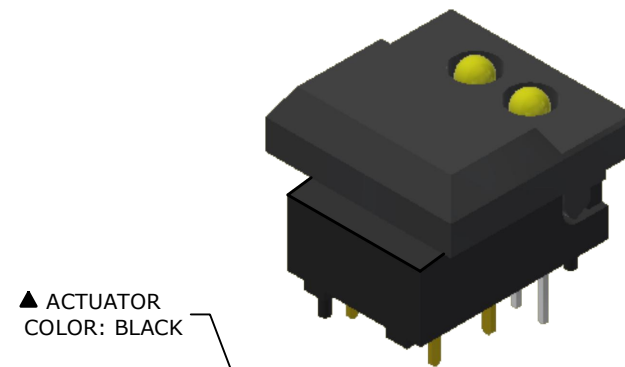


CIRCUIT: SPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATINGS: 30mA @ 12VDC
5. CONTACTS: FIXED AND MOVING:
COPPER ALLOY W/GOLD PLATE
6. CONTINUOUS CURRENT RATING 120mA
7. POWER RATING: 240mW
8. OPERATING FORCE: $150 \pm 50\text{gf}$
9. OPERATING TRAVEL: $1.5 \pm 0.3\text{mm}$
10. ▲ DENOTES CRITICAL PARAMETER.

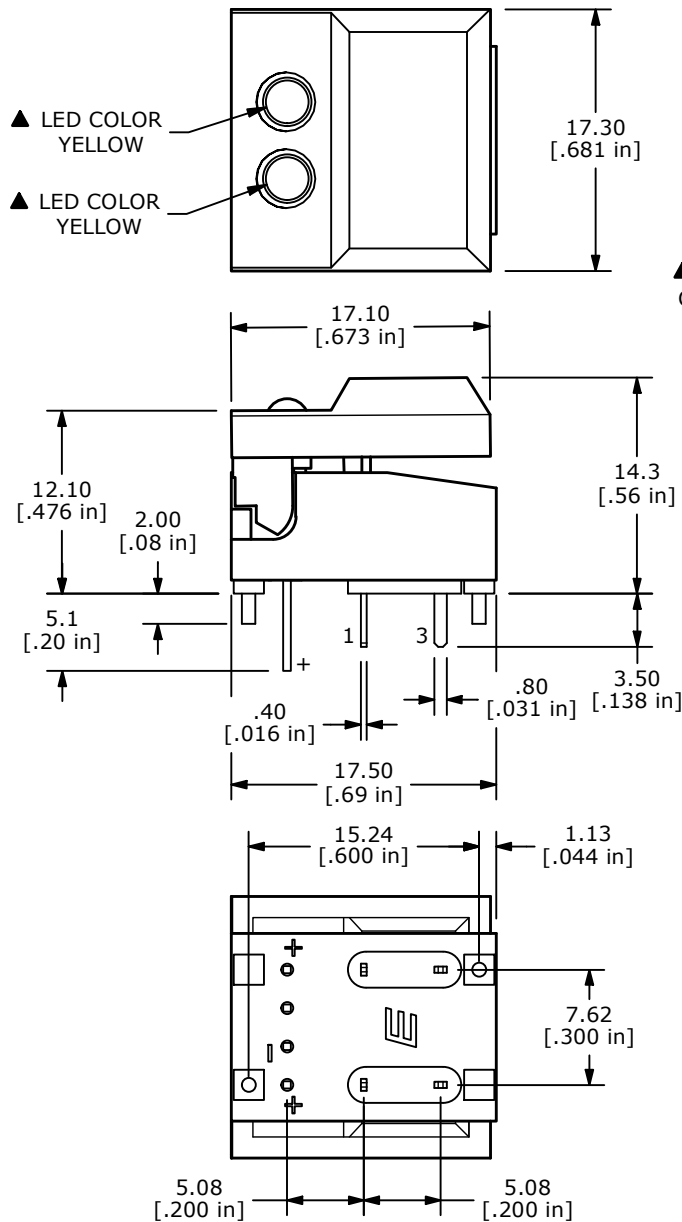

LED SPECS	UNITS	YELLOW	YELLOW
FORWARD CURRENT	mA	30 MAX	30 MAX
FORWARD VOLTAGE	V	1.8 - 2.8	1.8 - 2.8
LUMINOUS INTENSITY	mcd	12 TYP	12 TYP

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-102419	Release	12/28/23	MW						100126396
					TITLE 5511MBLKYEYEL					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					2:1	12/13/2023	MW	XR0253P	A	