
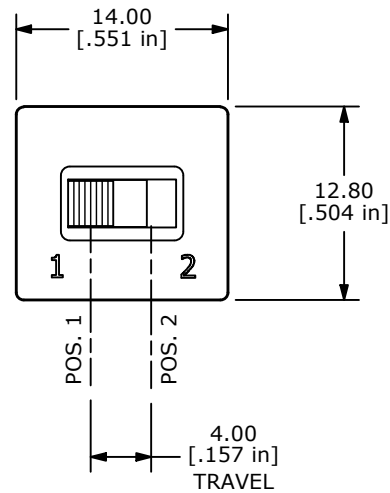
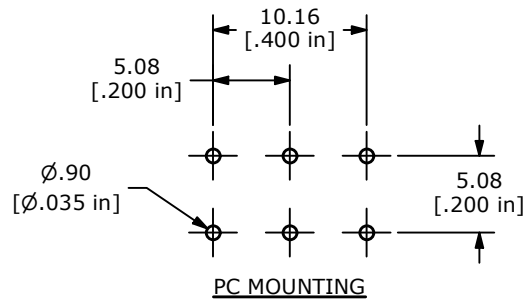
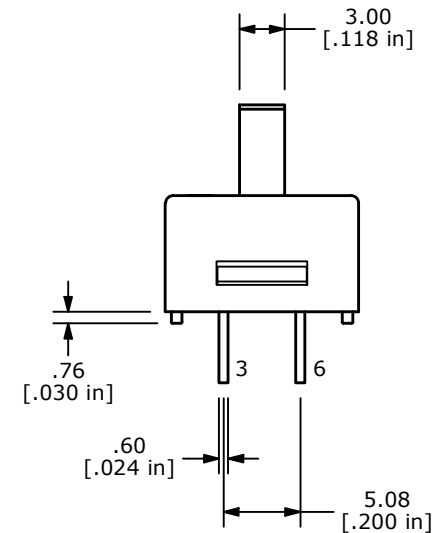
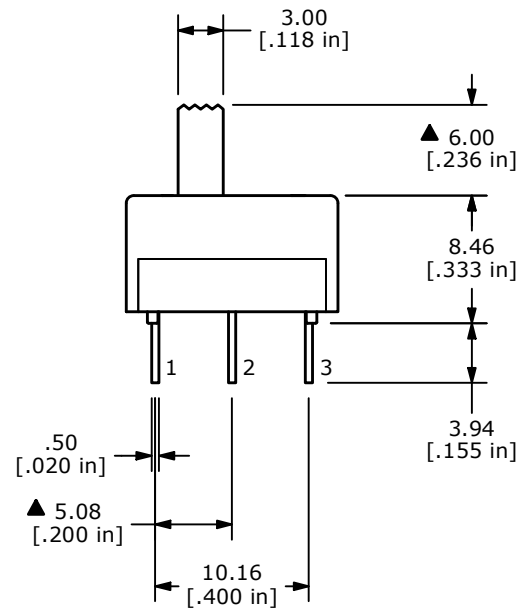


SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-1, 5-4	2-3, 5-6



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. CONTACT RATING: 0.4 VA MAX. @ 20V (AC or DC)
6. ELECTRIC LIFE: 20,000 ACTUATIONS AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 M Ω MIN.
8. CONTACT RESISTANCE: 50 m Ω MAX.
9. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
10. OPERATING TEMP.: -40°C to 80°C
11. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102154	Release	08/08/23	MW	TITLE 600DP1S4M4R				100125306
					SCALE	DATE	DR	DWG	REV
					2:1	8/4/2023	MW	T622006	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED