
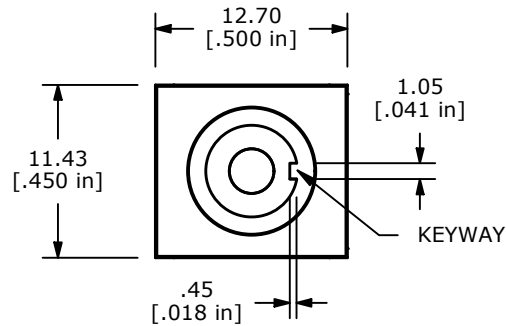
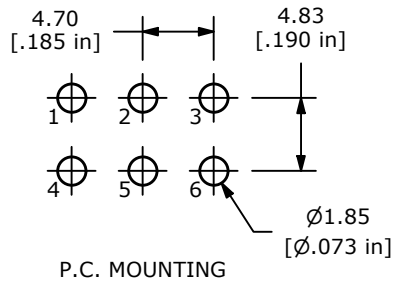




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

(ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- CONTACT RESISTANCE: 20 mΩ MAX.
- RATING: 1A @250VAC, 3A @ 120VAC (or 28VDC)
- ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- MECHANICAL LIFE: 50,000 CYCLES
- INSULATION RESISTANCE: 1,000 MΩ min.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- INGRESS PROTECTION: IP67
- OPERATING TEMP.: -40°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

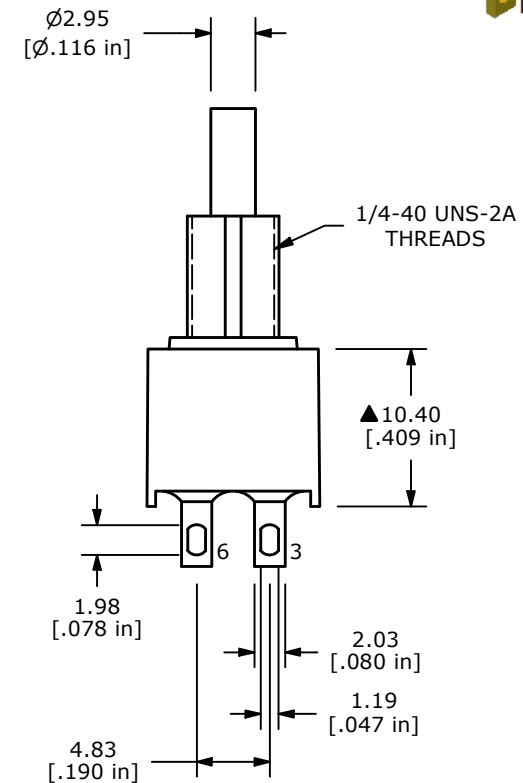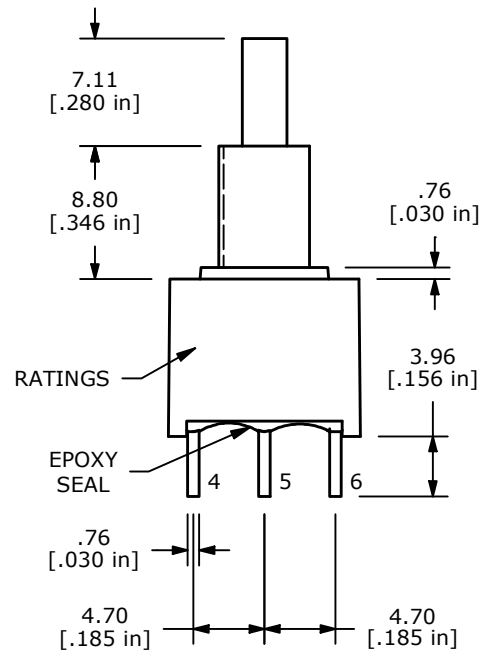

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-103072	700A SERIES UPDATE	11/22/24	JS	TITLE 700ADP7B10M1QE				000025817
					SCALE 2:1	DATE 5/23/2012	DR drg	DWG T750107	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED