


▲ SWITCH FUNCTION



POS. 1	POS. 2
ON	(ON)
1-3	1-2

(ON) = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING: SILVER CONTACTS, GOLD OVER SILVER TERMINALS
5. CONTACT RESISTANCE: 20 m Ω MAX.
6. RATING: 3A @ 120VAC OR 28VDC
1A @ 250VAC
7. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
8. MECHANICAL LIFE: 50,000 CYCLES
9. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
10. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
11. OPERATING TEMP.: -40°C to 85°C
12. INGRESS PROTECTION: IP67
13. ▲ DENOTES CRITICAL PARAMETER.

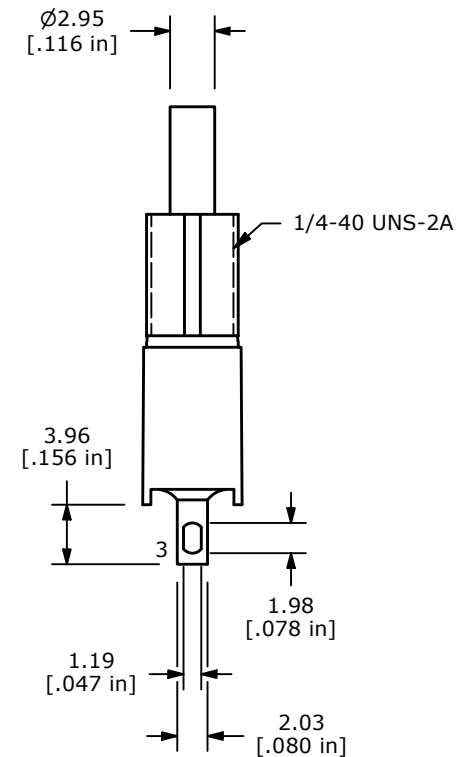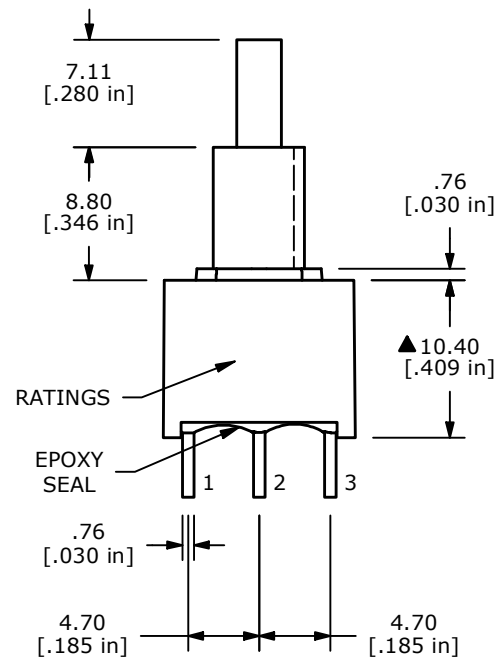

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-103072	700A SERIES UPDATE	11/22/24	JS	TITLE 700ASP7B10M1QE				000025801
					SCALE	DATE	DR	DWG	REV
					2:1	6/7/2004	AR	T750000	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED