


P.C MOUNT

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2





(ON) = MOMENTARY



SCHEMATIC

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
5. CONTACT RESISTANCE: 20 m Ω MAX.
6. RATING: 0.4 VOLT-AMPS MAX. @20V MAX AC OR DC
7. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
8. MECHANICAL LIFE: 50,000 CYCLES
9. INSULATION RESISTANCE: 1,000 M Ω MIN.
10. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
11. OPERATING TEMP.: -40°C to 85°C
12. INGRESS PROTECTION: IP67
13. ▲ DENOTES CRITICAL PARAMETER.
14. HARDWARE TO BE SHIPPED BULK
T100000 - HEXNUT - QTY 2
T100011 - LOCKWASHER - QTY 1
T100015 - LOCKRING - QTY 1

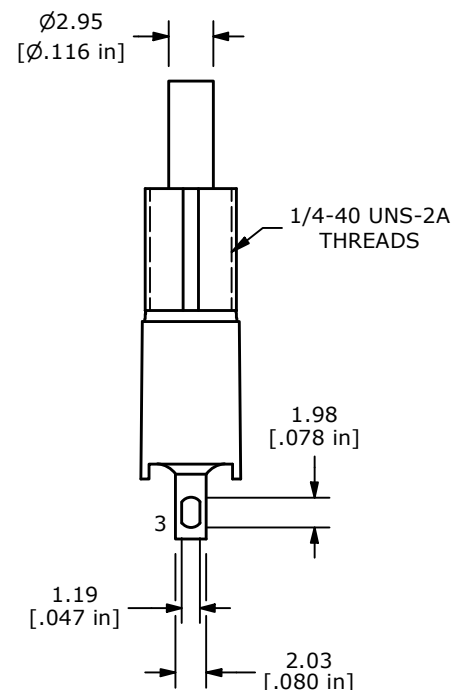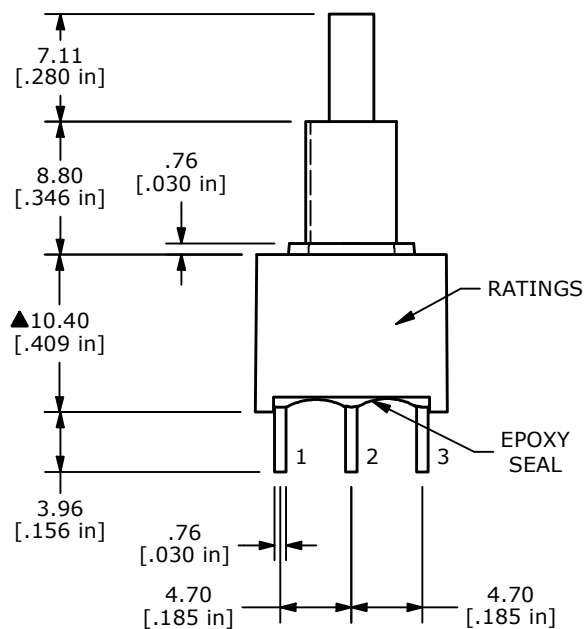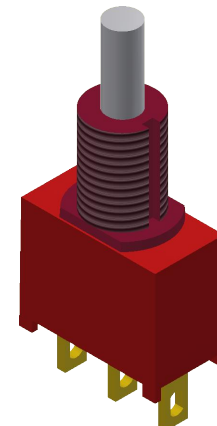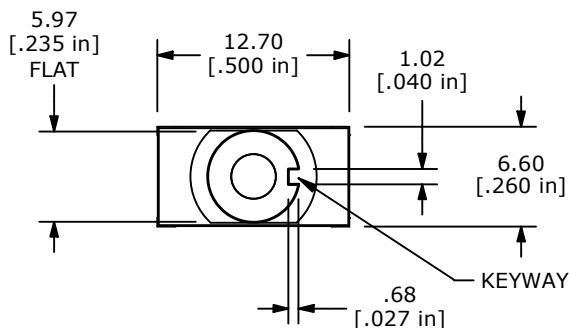

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
B	ECO-103072	700A SERIES UPDATE	11/22/24	JS	TITLE 700ASP7B10M1REH				000023386
					SCALE	DATE	DR	DWG	REV
					2:1	5/8/2019	MW	ST750100	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED