
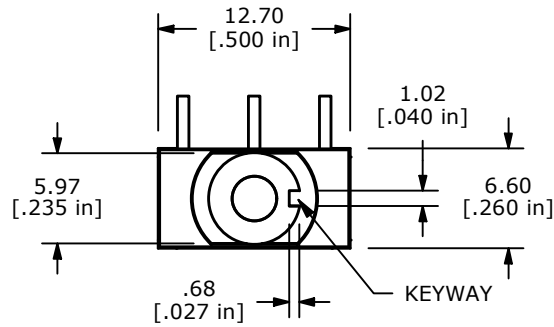
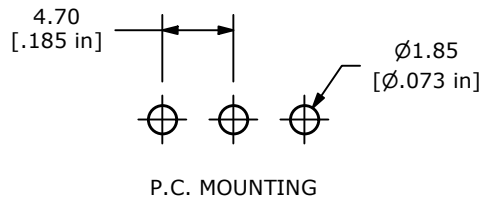




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2

(ON) = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
- ▲ 5. CONTACT RESISTANCE: 20 mΩ MAX.
6. RATING: 0.4 VOLT-AMPS MAX. @20V MAX AC OR DC
7. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
8. MECHANICAL LIFE: 50,000 CYCLES
9. INSULATION RESISTANCE: 1,000 MΩ MIN.
10. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
11. INGRESS PROTECTION: IP67
12. OPERATING TEMP.: -40°C to 85°C
13. ▲ DENOTES CRITICAL PARAMETER.
14. HARDWARE TO BE SHIPPED BULK
T100000 - HEXNUT - QTY 2
T100011 - LOCKWASHER - QTY 1
T100015 - LOCKRING - QTY 1

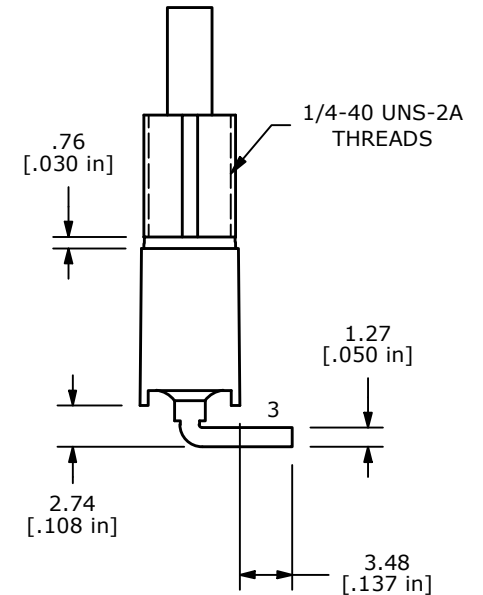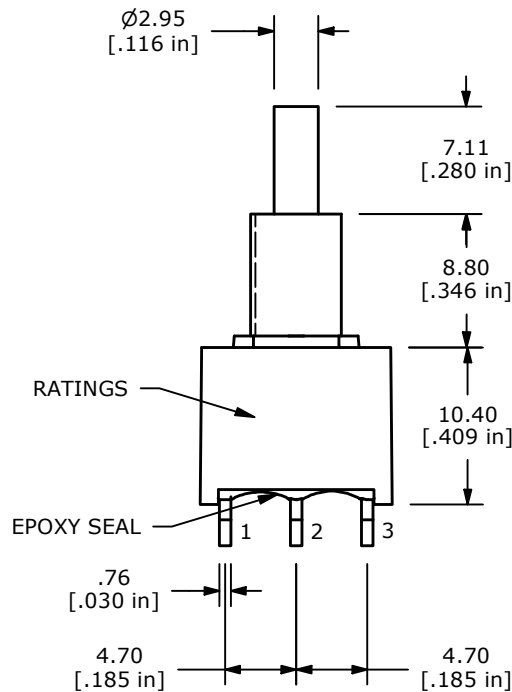

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
E	ECO-103090	700A SERIES UPDATE	11/25/24	JS	TITLE 700ASP7B10M6REH				000023387
					SCALE	DATE	DR	DWG	REV
					2:1	11/7/2007	BLR	ST750101	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED