

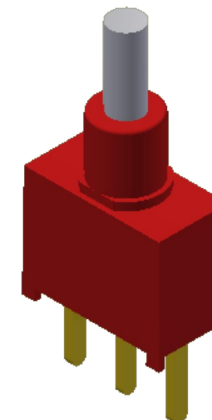


P.C.B. MOUNTING

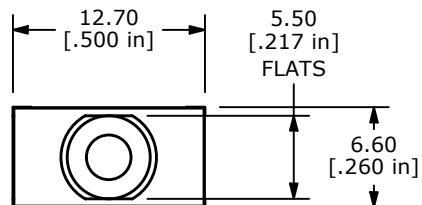

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2


(ON) = MOMENTARY



SCHEMATIC

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
5. CONTACT RESISTANCE: 20 m Ω MAX.
6. RATING: 0.4 VOLT-AMPS @ 20V MAX (AC OR DC)
7. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
8. MECHANICAL LIFE: 50,000 CYCLES
9. INSULATION RESISTANCE: 1,000 M Ω MIN.
10. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
11. OPERATING TEMP.: -40°C to 85°C
12. INGRESS PROTECTION: IP67
13. ▲ DENOTES CRITICAL PARAMETER.

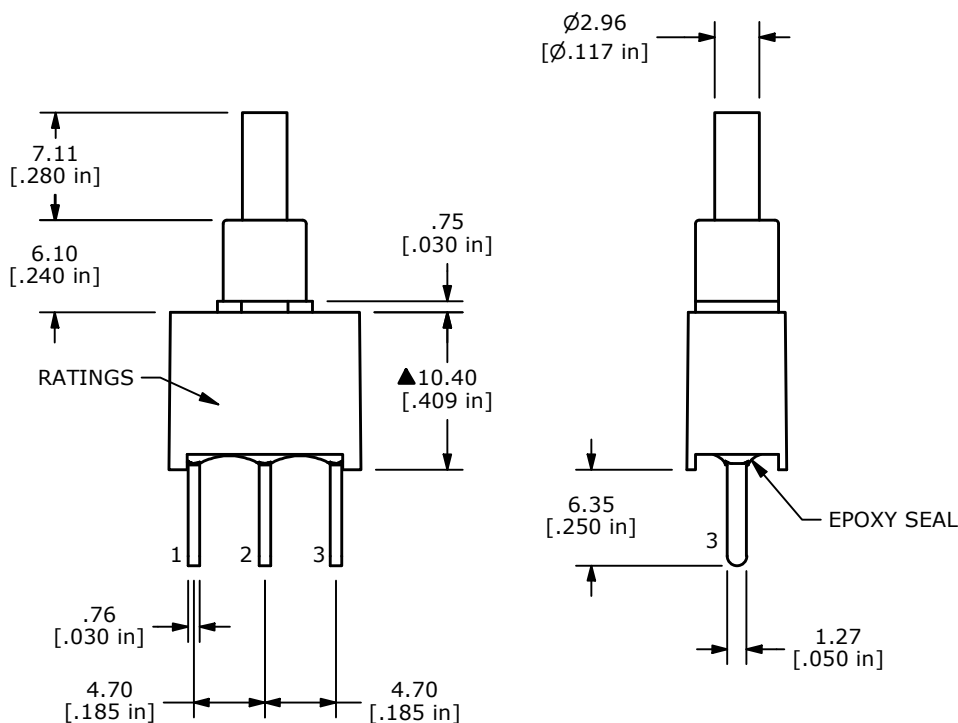

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
C	ECO-103072	700A SERIES UPDATE	11/22/24	JS						000025802
					TITLE 700ASP7B21M2RE					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 11/15/2004	DR AR	DWG T750001	REV C	