
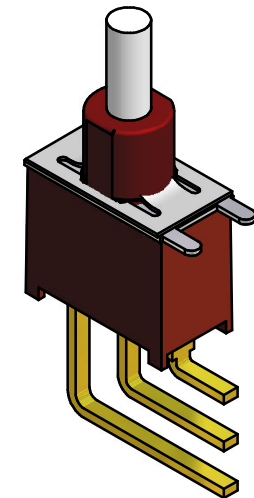
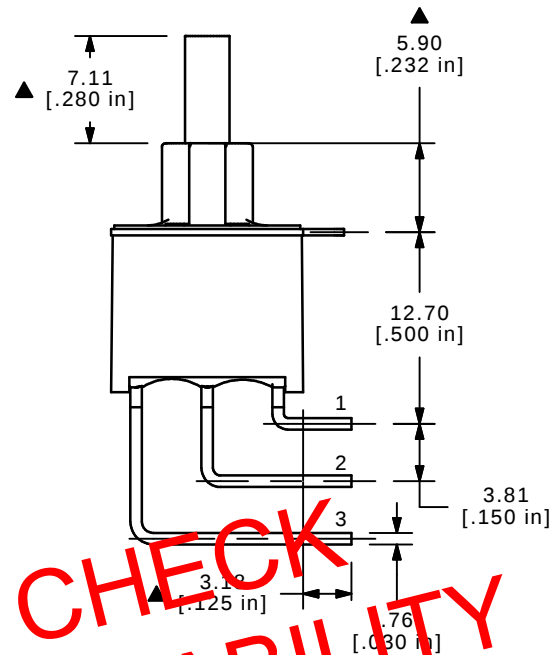


| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| ON              | (ON)   |
| 1-3             | 1-2    |


(ON) = MOMENTARY

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE:  $X.X = \pm 0.4$   
 $X.XX = \pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: GOLD
- RATING: 0.4 VOLT-AMPS @20V MAX (AC OR DC)
- ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,500 V RMS @sea level.
- OPERATING TEMP.: -30°C to 75°C
- ▲ DENOTES CRITICAL PARAMETER.

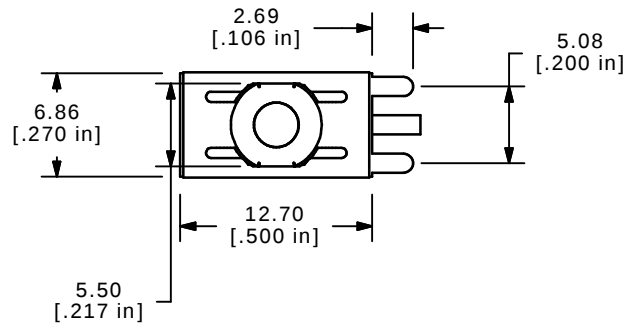

ISOMETRIC

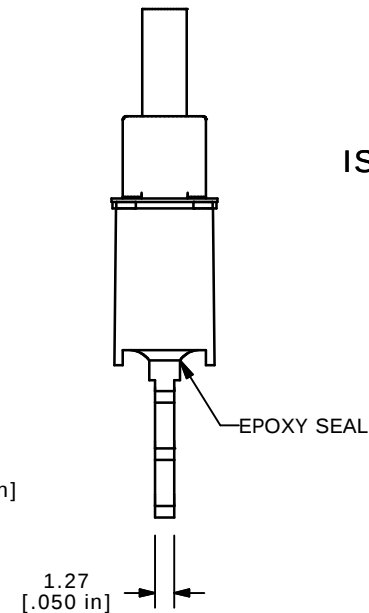

**CHECK  
AVAILABILITY  
ECO-101730**

**E-SWITCH®**

|     |        |                         |          |    |
|-----|--------|-------------------------|----------|----|
| A   | 14505  | RELEASED FOR PRODUCTION | 11/15/04 | AR |
| REV | PCR NO | DESCRIPTION             | DATE     | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 700ASP7B21M7RE

SCALE 2:1

DATE 6/8/04

DR AR

DWG T750002

REV A