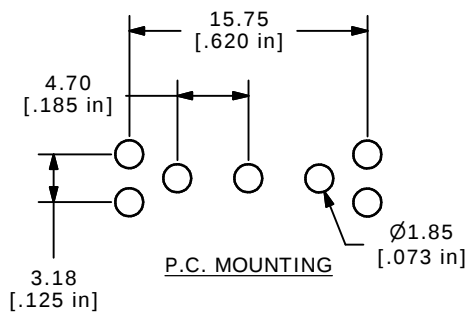



ISOMETRIC

SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3	1-2

(ON) = MOMENTARY

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 VOLT-AMPS @20V MAX (AC OR DC)
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,500 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C TO 75°C
10. ▲ DENOTES CRITICAL PARAMETER.

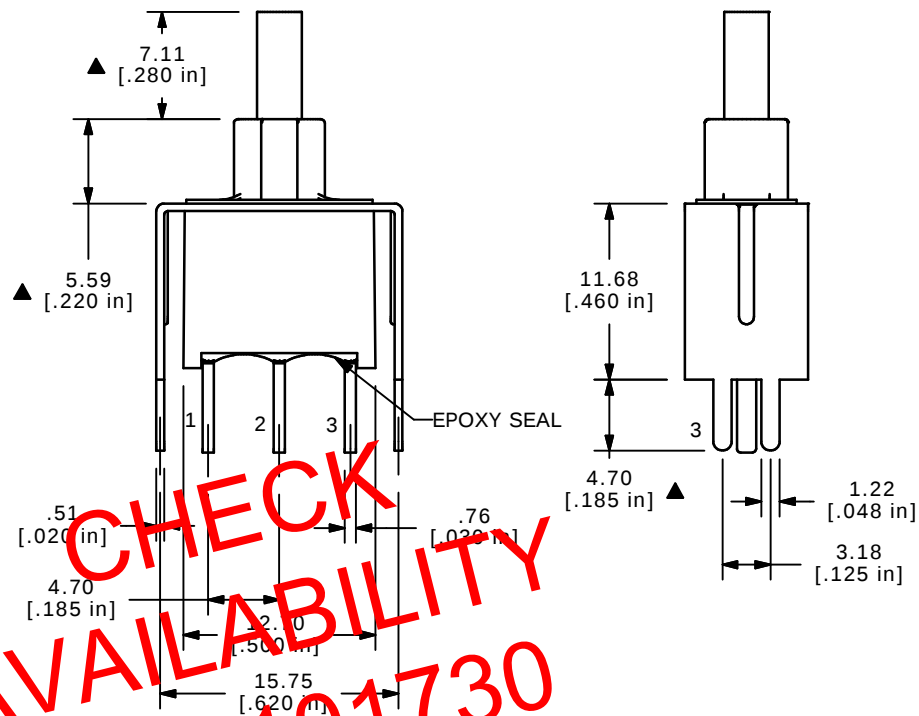

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions in inches and millimeters. The drawing includes a large red watermark reading "CHECK AVAILABILITY ECO-101730".

Dimensions shown:

- Top horizontal dimension: .51 [.020 in]
- Right horizontal dimension: .76 [.020 in]
- Left vertical dimension: 4.70 [.185 in]
- Bottom horizontal dimension: 15.75 [.620 in]
- Internal horizontal dimension: 2.0 [.500 in]

E-SWITCH®

A	14507	RELEASED FOR PRODUCTION	11/15/04	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 700ASP7B21VS2RE				
SCALE 2:1	DATE 11/15/04	DR AR	DWG T750004	REV A