
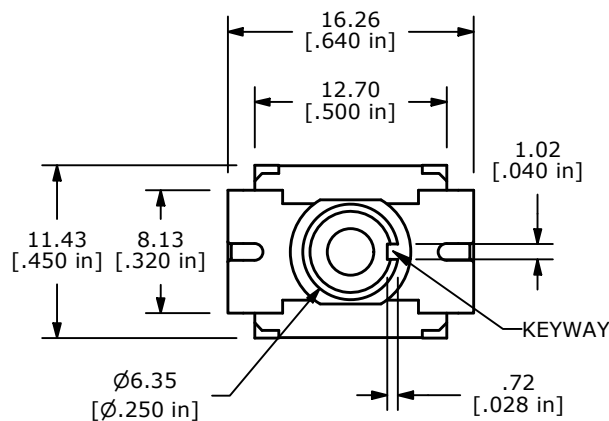
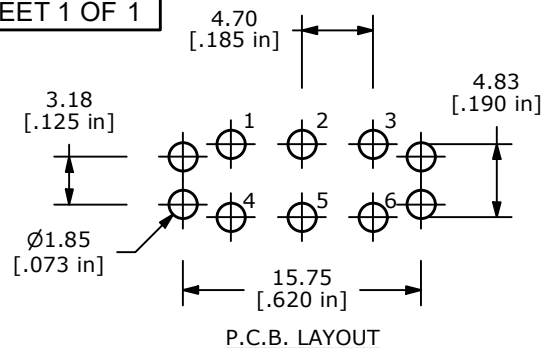




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

() = MOMENTARY



NOTES;

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
- TERMINAL NUMBERS FOR REFERENCE ONLY
- PLATING MATERIAL: GOLD
- RATING: 0.4VA MAX. @ 20VAC or DC MAX.
- ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
- MECHANICAL LIFE: 50,000 CYCLES
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- ACTUATION FORCE: $800 \pm 200\text{gf}$
- TRAVEL: $1.0 \pm 0.2\text{mm}$
- CONTACT RESISTANCE: 20 mΩ MAX. TYPICAL @ 2-4 VDC
- DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
- OPERATING TEMP.: -40°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

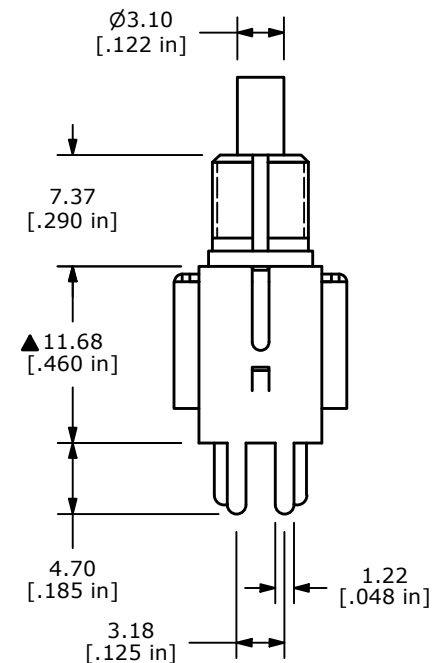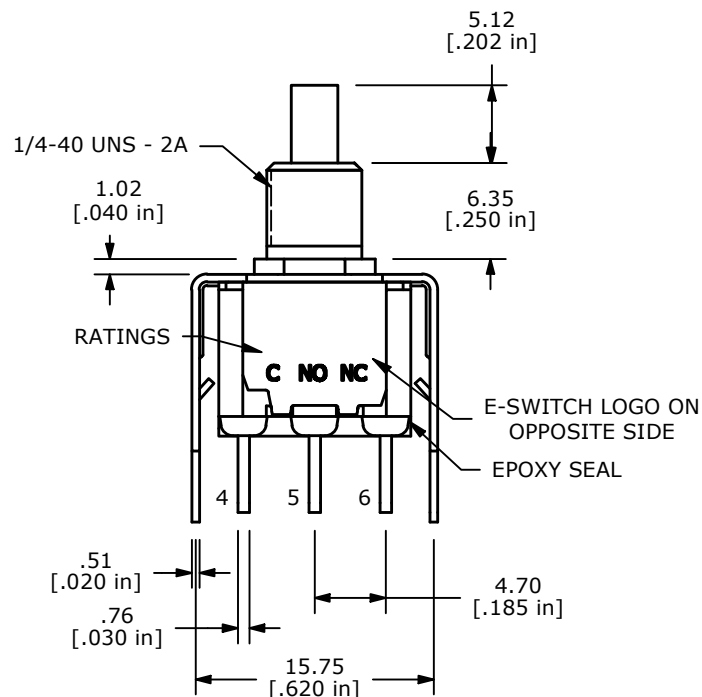

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-102926	700 SERIES UPDATE	10/14/24	JS	TITLE 700DP7B10VS2RE				000025793
					SCALE 2:1	DATE 6/21/2006	DR CT	DWG T721014	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED