



PANEL MOUNTING

PANEL THICKNESS	(X) DIM.
1.19 - 2.30	15.70 - 15.75
2.31 - 3.18	15.75 - 15.88




▲ CAP
COLOR: BLACK

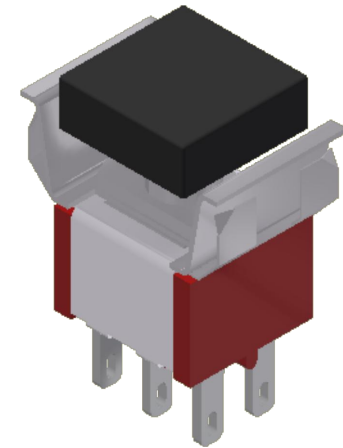

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5



(ON)=MOMENTARY



CIRCUIT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 1A @ 250VAC
3A @ 120VAC or 28VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD
7. INSULATION RESISTANCE: 1,000M OHM MIN.
8. ACTUATION FORCE: 300 ± 100 gf
9. TRAVEL: 1.0 ± 0.2 mm
10. CONTACT RESISTANCE: 20m OHM MAX.
TYPICAL @ 2-4 VDC
11. DIELECTRIC STRENGTH: 1,000 Vrms min. @ SEA LEVEL
12. OPERATING TEMP.: -40°C to 85°C
13. ▲ DENOTES CRITICAL PARAMETER.

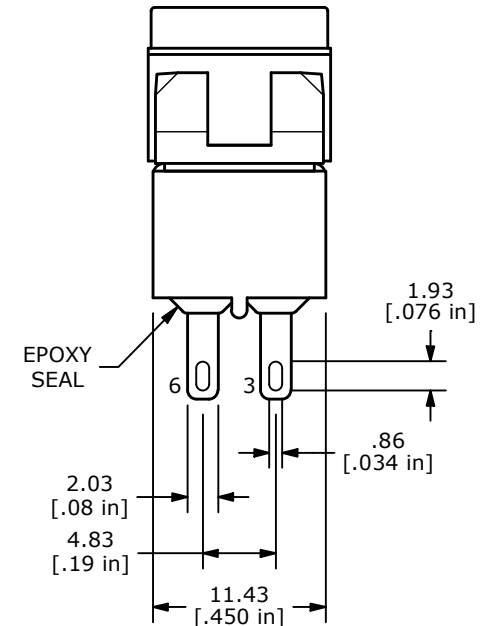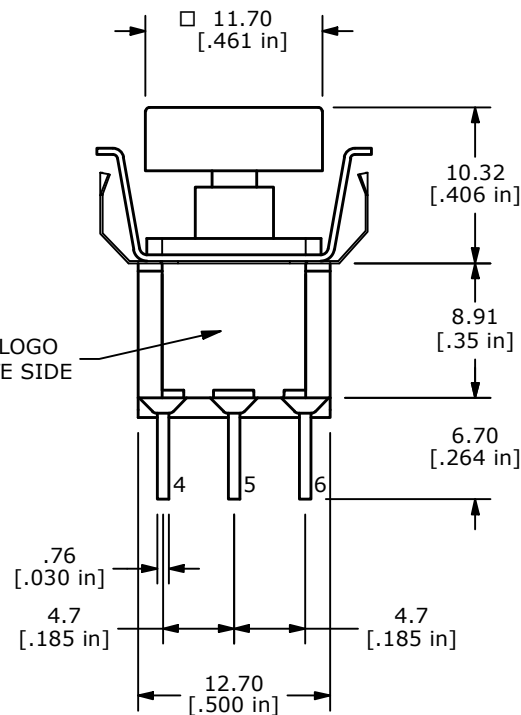E-SWITCH LOGO
ON OPPOSITE SIDEEPOXY
SEAL

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102782	Release	06/06/24	MW	TITLE 700DP7M1QEAP1BLK				100127582
					SCALE	DATE	DR	DWG	REV
					2:1	6/5/2024	MW	T721034	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED