



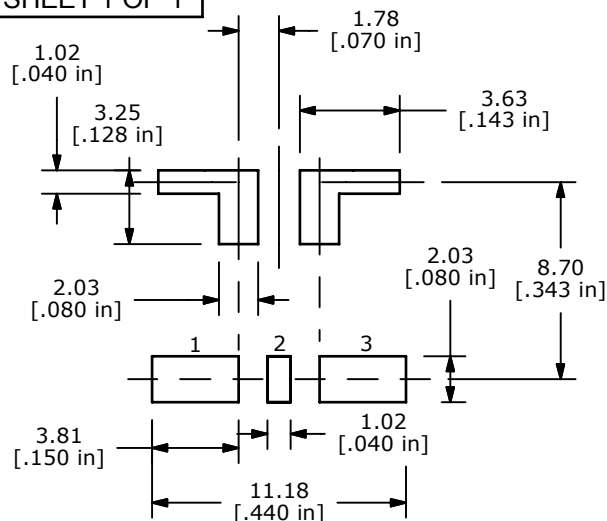

PCB LAYOUT





SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-1	2-3

(ON) = MOMENTARY



NOTES:

- ALL DIMENSIONS IN MM [INCH].
- TERMINAL NUMBERS FOR REF. ONLY.
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- PLATING MATERIAL: GOLD
- RATING: 0.4VA MAX. @ 20VAC OR DC
- MECHANICAL LIFE: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 VRMS @ SEA LEVEL
- OPERATING TEMPERATURE: -30°C TO 85°C
- ▲ DENOTES CRITICAL PARAMETER
- PACKAGED 500 PCS. / REEL
- 2002/95/EC (ROHS) COMPLIANT.

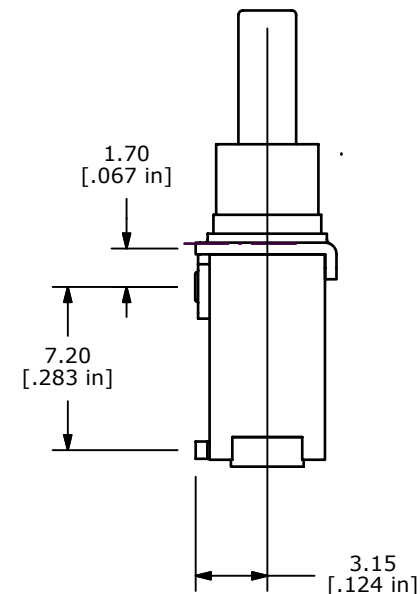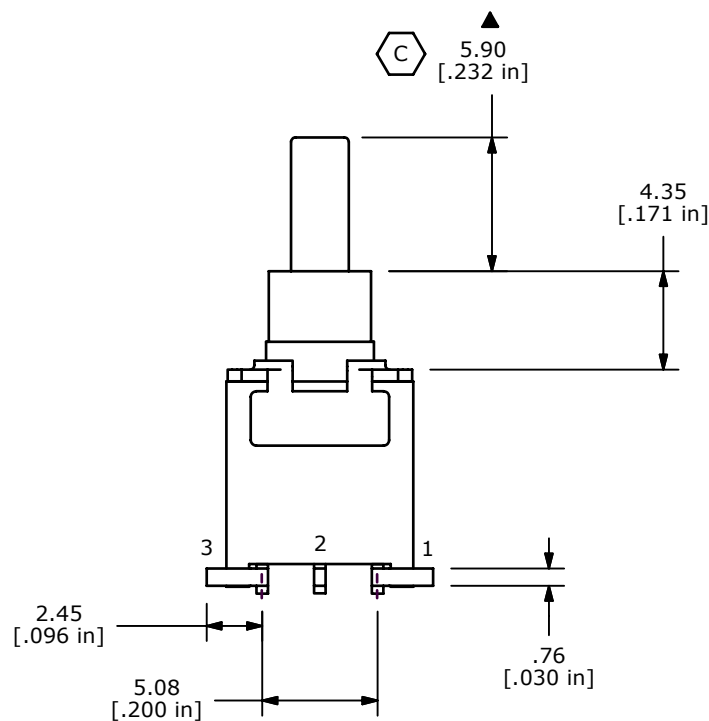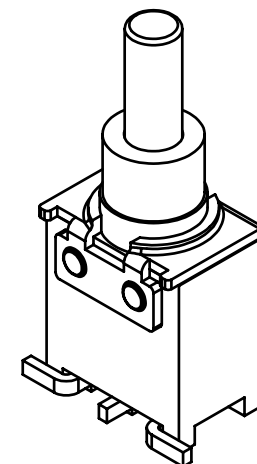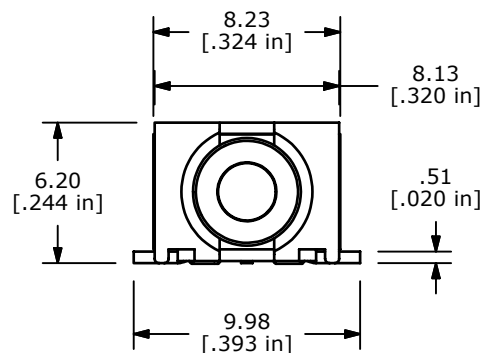

C	17859	CORRECTED ACTUATOR HEIGHT, TITLE	11/13/07	BLR
B	17839	REDRAWN FOR RE-RELEASE	11/02/07	BLR
A	16251	NEW RELEASE	7/26/06	BK
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE 800BWSP8SM6RE

SCALE 3:1

DATE 11/13/2007

DR BLR

DWG T833022

REV C