




▲ SWITCH FUNCTION

POS. 1	POS. 2
ON	ON
2-1	2-3



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT/TERMINAL PLATING: SILVER
5. RATING: 3A @ 120VAC or 28VDC, 1A @ 250VAC
6. ELECTRICAL LIFE: 6,000 CYCLES
7. CONTACT RESISTANCE: R=20 m Ω max., Q=50 m Ω max.
8. INSULATION RESISTANCE: 1,000 M Ω min. @ 1000VDC
9. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
10. OPERATING TEMP.: -30°C to 85°C
11. OPERATING FORCE: 350 $\pm$ 100gf
12. TRAVEL: Electrical Make: 1.34 $\pm$ 0.25mm / Full travel: 1.88 $\pm$ 0.30mm
13. ▲ DENOTES CRITICAL PARAMETER.

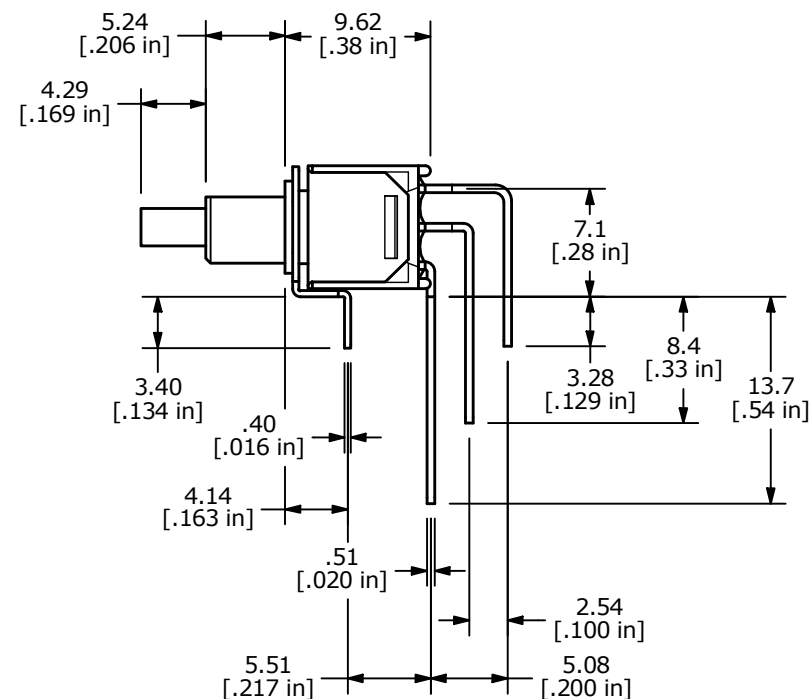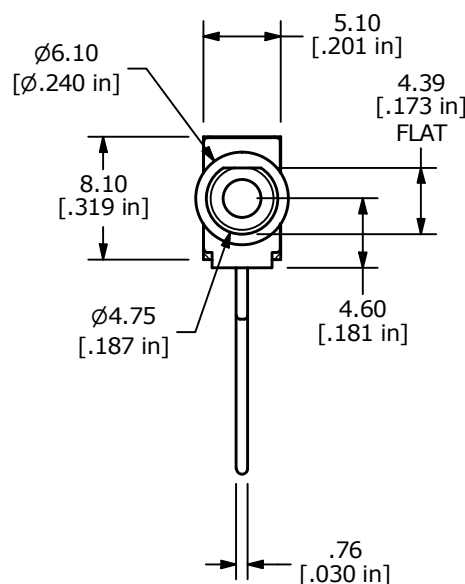

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-101194	update notes	08/24/22	MW	TITLE 800CSP1B6M7QE				000025962
					SCALE	DATE	DR	DWG	REV
					2:1	11/10/2015	rc	T835003	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED