


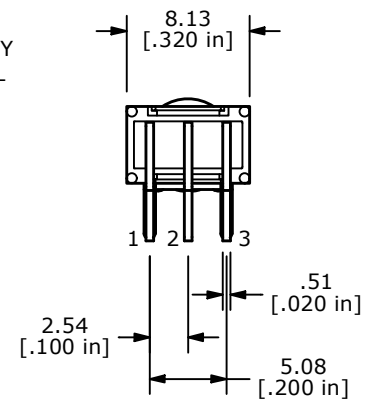
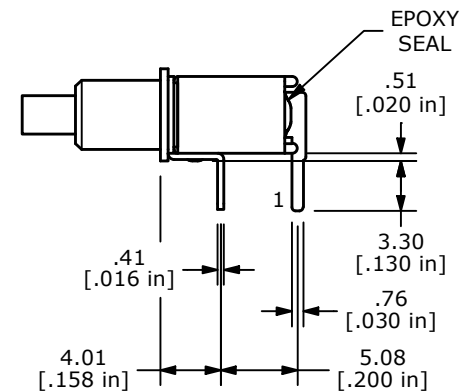
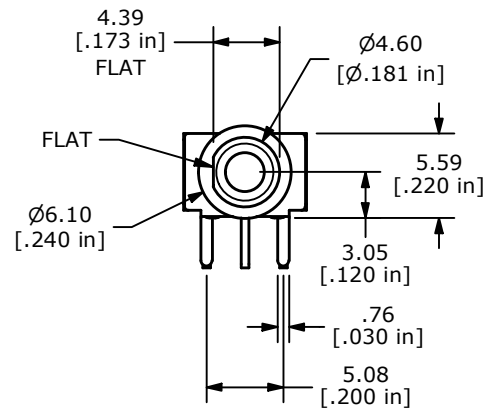


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-1	2-3
(ON)=MOMENTARY	



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACTS/TERMINALS: GOLD PLATED
- RATING: 0.4VA @ 20V AC or DC MAX.
- ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
- MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
- CONTACT RESISTANCE: 20m Ω MAX. INITIAL @ 2-4VDC
100mA FOR BOTH GOLD AND SILVER CONTACTS
- INSULATION RESISTANCE: 1,000M Ω MIN.
- ELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
- OPERATING TEMP.: -40°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

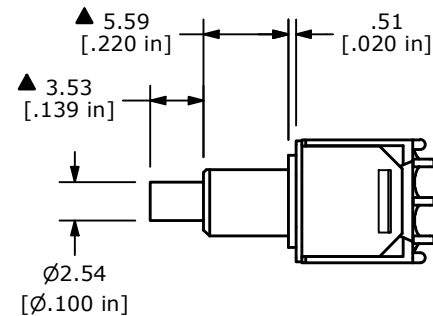

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID	
F	ECO-103159	print update	12/30/24	MW					000025888	
					TITLE 800SP8B6M6RE					
					SCALE 2:1		DATE 6/27/2011	DR BMA	DWG T822003	REV F
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED										