


▲ SWITCH FUNCTION



POS. 1	POS. 2
OFF	(ON)
OPEN	1-3

(ON)=MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACTS/TERMINALS: SILVER PLATED
5. RATING: 1A @ 250 VAC
3A @ 120 VAC OR 28 VDC
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
7. MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
8. CONTACT RESISTANCE: 20m Ω MAX. INITIAL @ 2-4VDC 100mA
FOR BOTH GOLD AND SILVER CONTACTS
9. INSULATION RESISTANCE: 1,000M Ω MIN.
10. ELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
11. OPERATING TEMP.: -40°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.

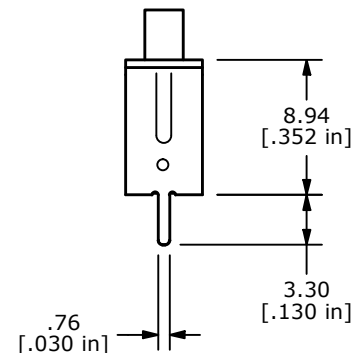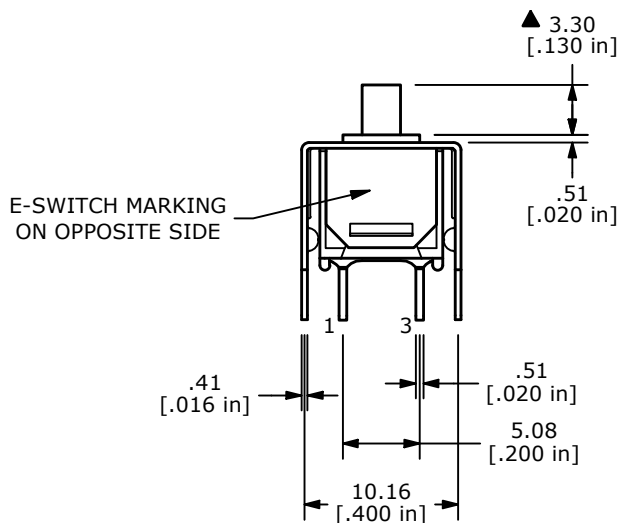

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
B	ECO-103116	Print update	12/25/24	MW					100127080
					TITLE 800SP9B10VS2QE				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 3/20/2024	DR MW	DWG T811078	REV B