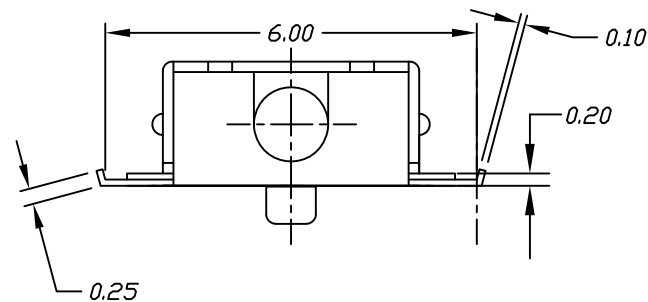
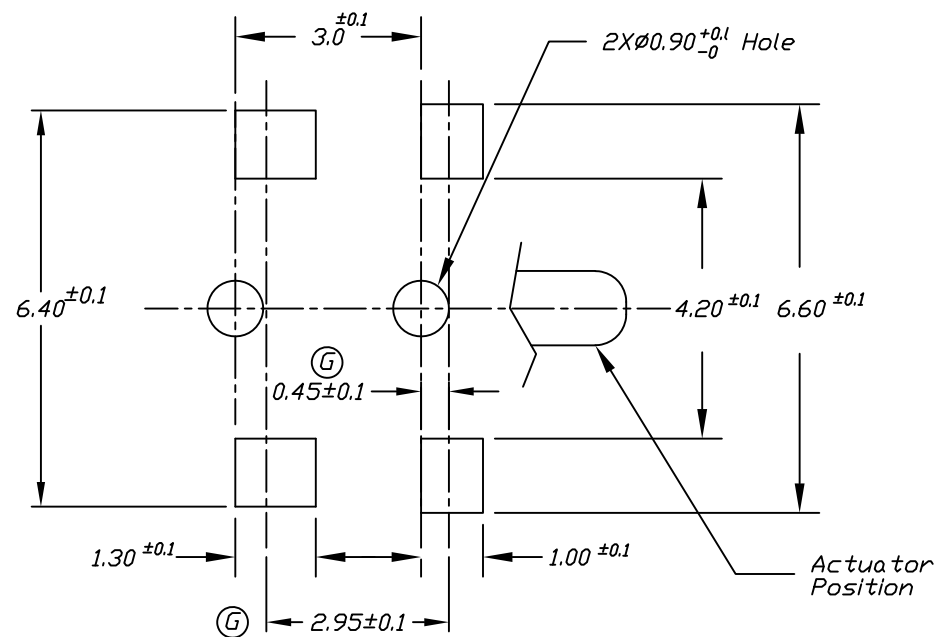
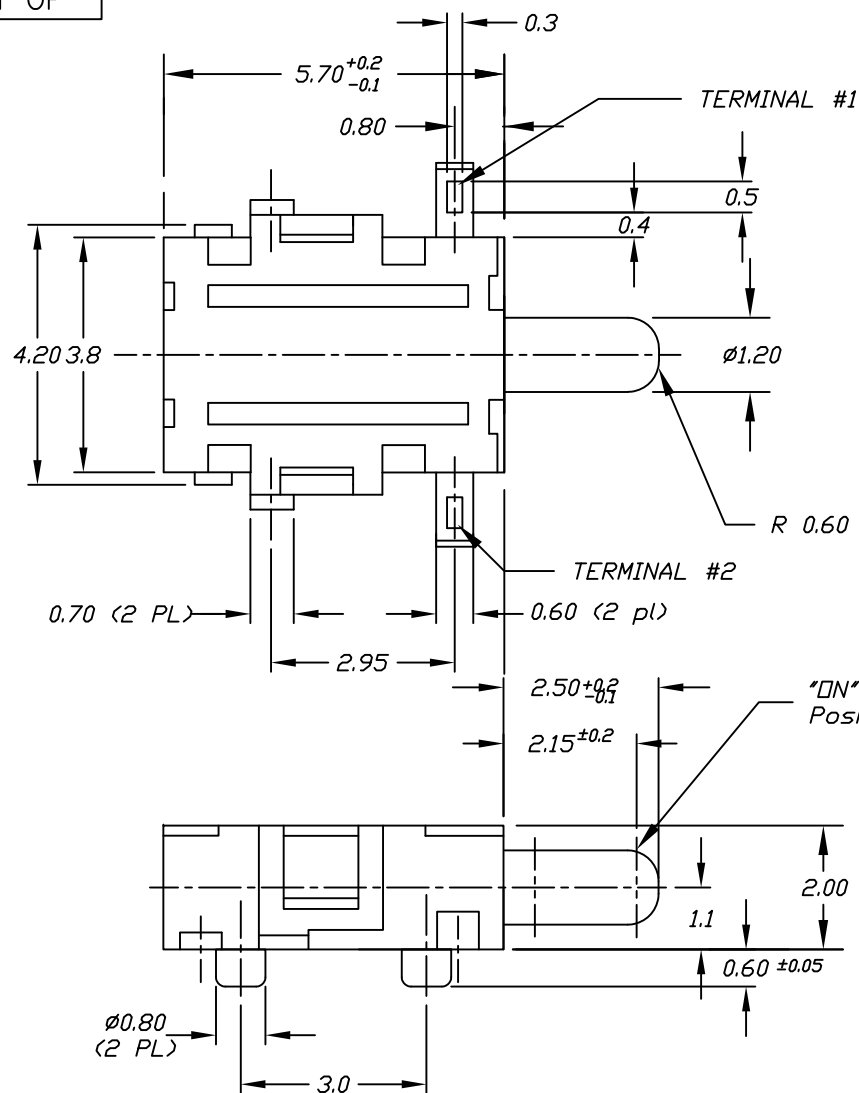


NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.2
- TRAVEL (TOTAL): 2.0 mm
- OPERATING FORCE: 50gf Max.
- RATING: 12V DC, 100mA (Resistive load)
- CONTACT RATING: 80m ohms max.
- OPERATING TEMP. -20°C to 80°C
- MATERIALS
HOUSING; 4/6 NYLON
ACTUATOR; 6T NYLON
COVER/SPRING; STAINLESS STEEL
CONTACTS; SILVER PLATED PHOSPHOR BRONZE
TERMINALS; SILVER PLATED BRASS
- PACKAGING: TAPE AND REEL, 1900 PIECES PER REEL.

CONTACT CONFIGURATION
SPST NORMALLY OPEN (N.O.) CONTACTS

OBJECT ID: 000018042

H	15120	REVISED TERMINAL SHAPE	7/28/05	RC	E-SWITCH® 900 BG Q				
G	12884	ADD PCB CENTER TO CENTER	3/5/03	CB					
F	12751	REVISED, ADD NEW DIM	1/23/03	CB	900 BG Q				
E	12201	ADD NOTE 8	5/31/02	CB					
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					8:1	8/24/98	MM	P010901	H