






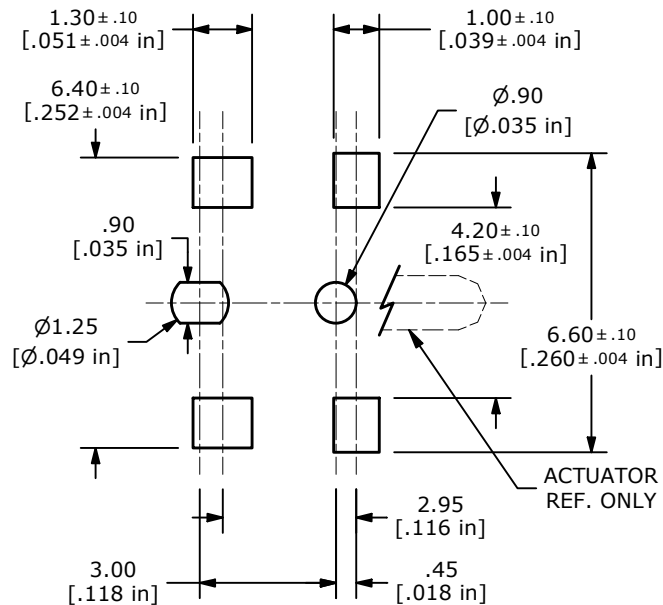


RECOMMENDED PCB LAYOUT



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT MATERIAL: SILVER
5. RATING: 100mA 12VDC (RESISTIVE LOAD)
6. OPERATING FORCE: 100gf MAX.
7. OPERATING LIFE: 50,000 CYCLES min.
8. INSULATION RESISTANCE: 100M OHMS min @500VDC
9. OPERATING TEMPERATURE: -25°C to 85°C
10. DIELECTRIC STRENGTH: >1,00VRMS AT SEA LEVEL
11. ▲ DENOTES CRITICAL PARAMETER

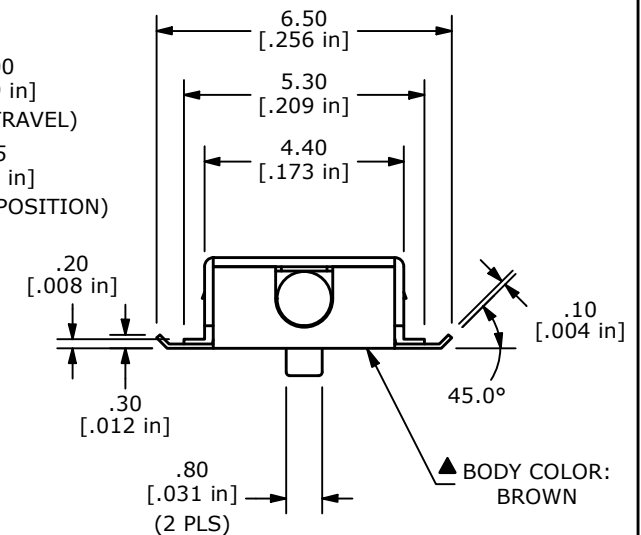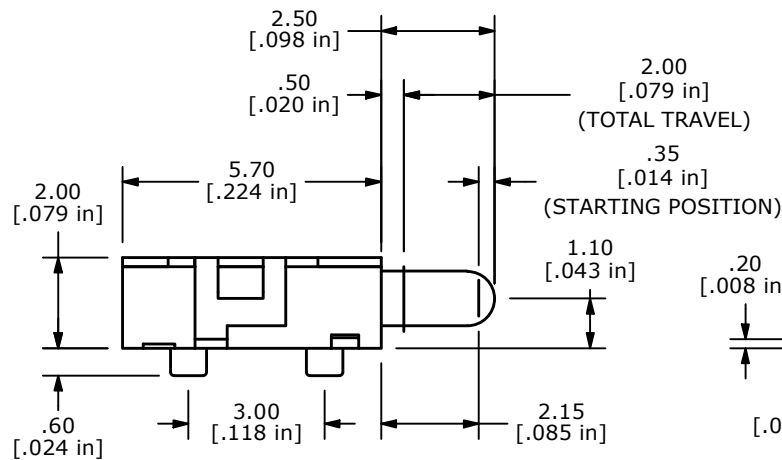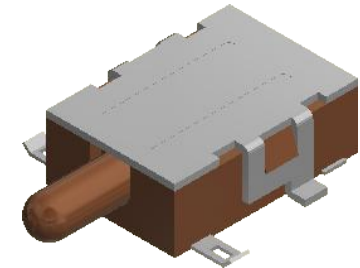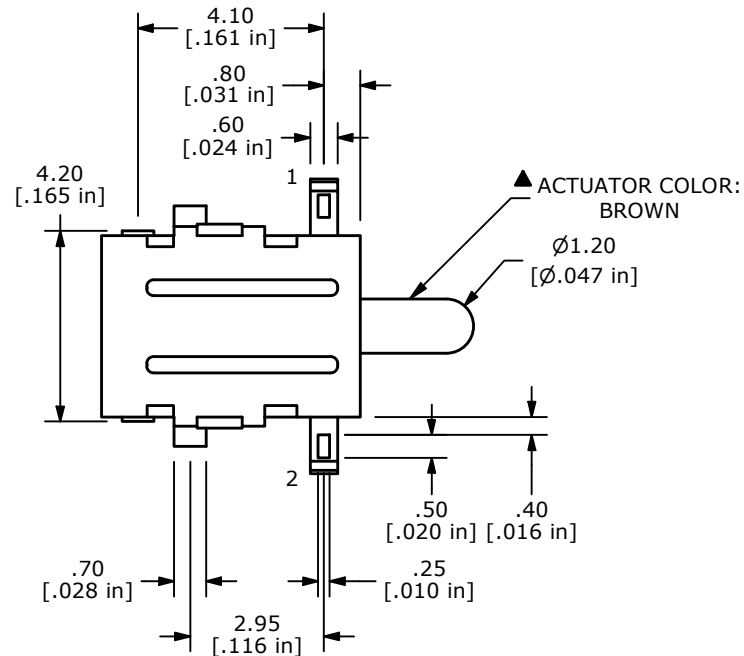

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101653	NEW RELEASE	02/10/23	MR	TITLE 900BHQ				100123611
					SCALE	DATE	DR	DWG	REV
					6:1	2/9/2023	MJR	P010905	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED