



## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RESISTANCE: 1 OHM MAX.
5. RATING: 1A @ 5-24VDC
6. INGRESS PROTECTION: IP68
7. ELECTRIC LIFE: 50,000,000 CYCLES
8. OPERATING TEMP.: -40°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.
10. HARDWARE SUPPLIED: O-RING AND HEXNUT BULK IN BAGS

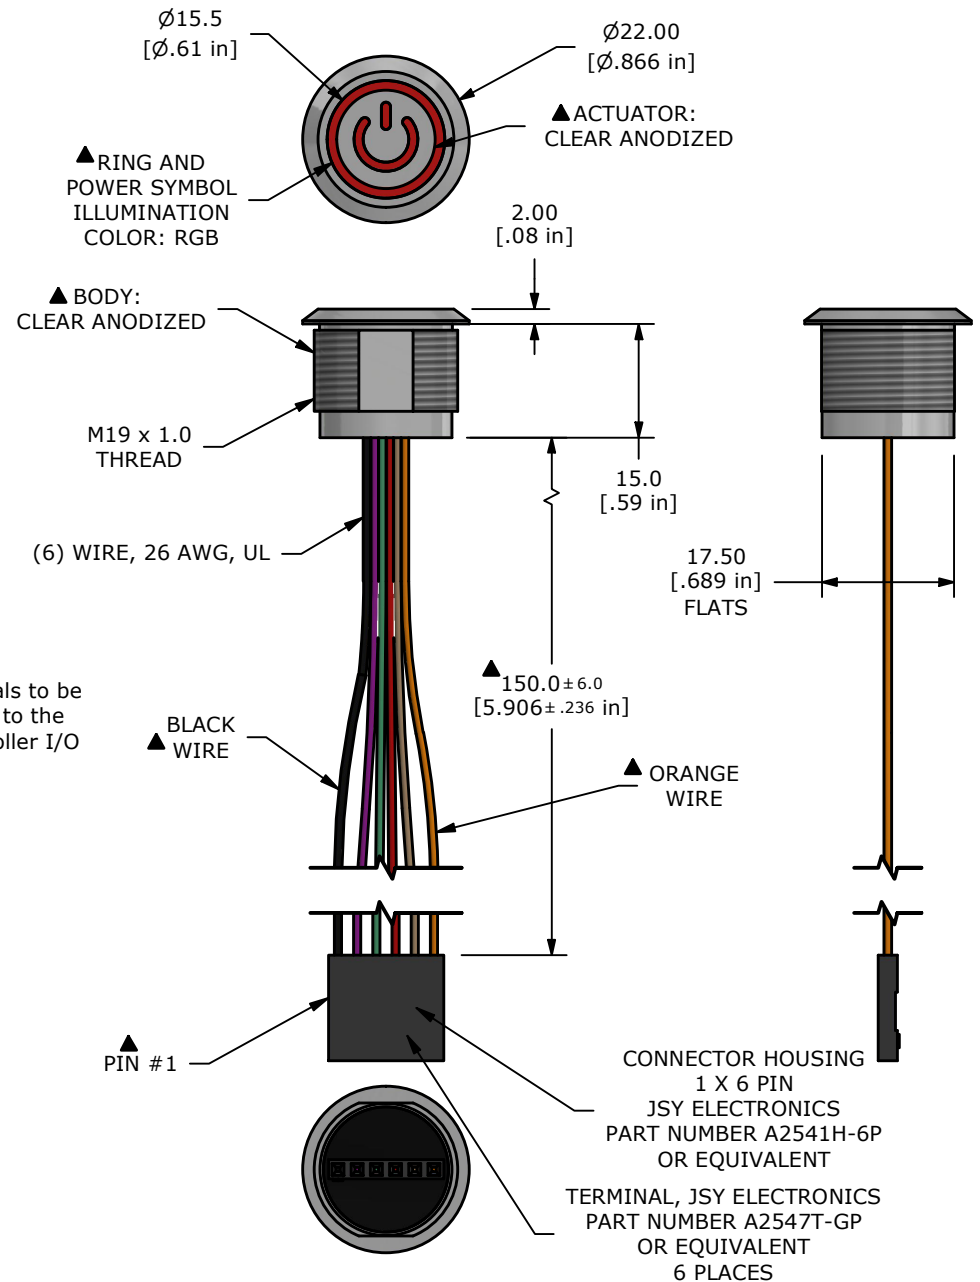

| REV   | ECO NO     | DESCRIPTION                        | DATE     | BY |  |           |    |         | OBJECT ID |
|---|------------|------------------------------------|----------|----|---|-----------|----|---------|-----------|
| C   | ECO-102092 | NOTE 8 -40C TO 85C WAS -20C TO 65C | 07/10/23 | JS | TITLE CS4M2FP   |           |    |         | 000023601 |
| B   | ECO-101884 | PRINT UPDATE                       | 05/18/23 | JS |   |           |    |         |           |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO<br>E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |                                    |          |    | SCALE   | DATE      | DR | DWG     | REV       |
|   |            |                                    |          |    | 1:1   | 9/20/2018 | rc | T070003 | C         |