



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RESISTANCE: 1 OHM MAX.
5. RATING: 1A @ 5-24VDC
6. INGRESS PROTECTION: IP68
7. ELECTRIC LIFE: 50,000,000 CYCLES
8. OPERATING TEMP.: -20°C to 65°C
9. ▲ DENOTES CRITICAL PARAMETER.
10. HARDWARE SUPPLIED: O-RING AND HEXNUT BULK IN BAG

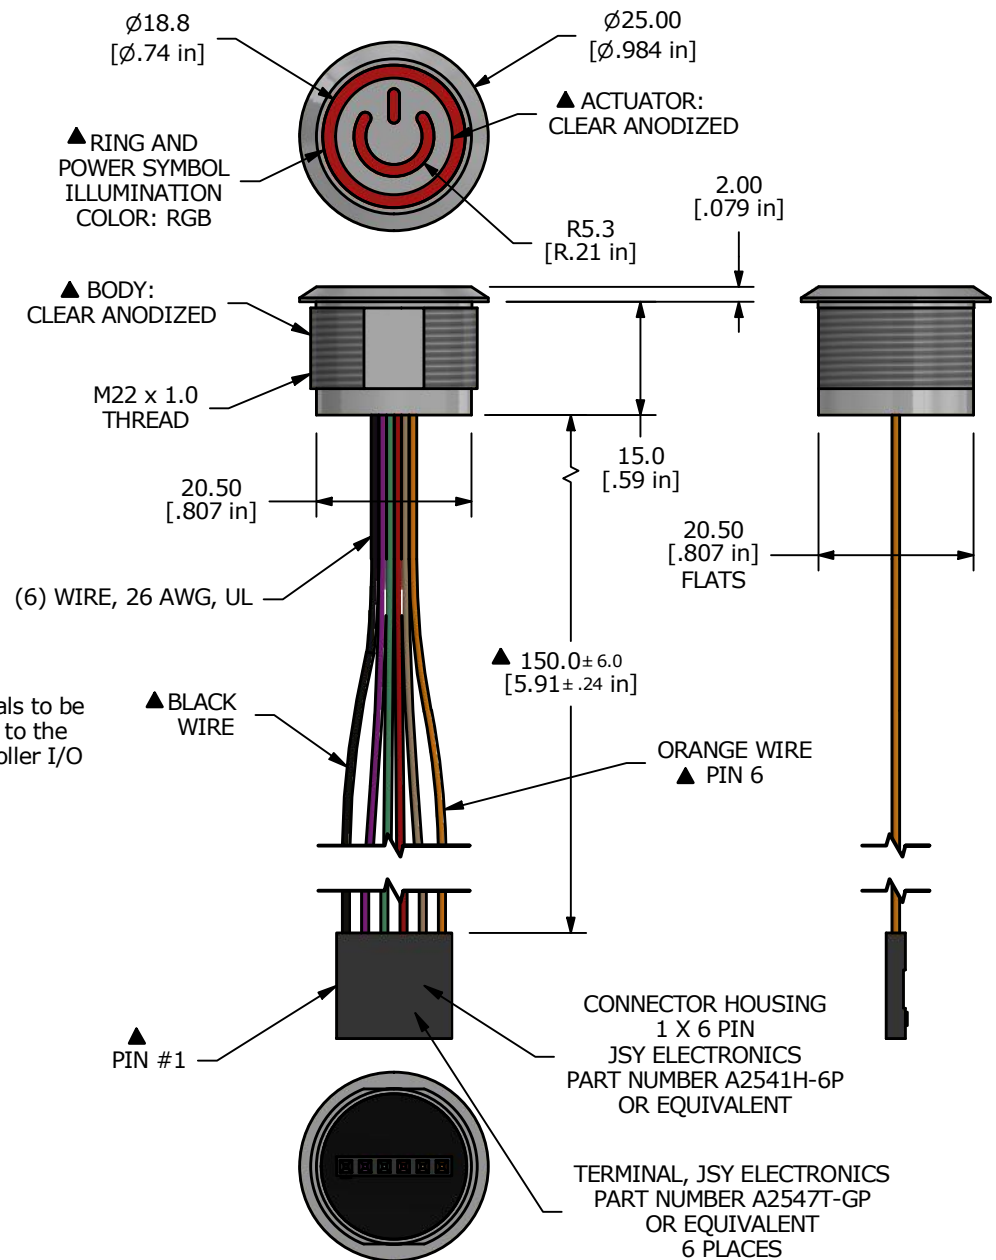

REV	ECO NO	DESCRIPTION	DATE	BY	<div> E-SWITCH®</div>					OBJECT ID
B	ECO-101884	PRINT UPDATE	05/18/23	JS						000023605
					TITLE CS7M2FP					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1:1	DATE 9/20/2018	DR rc	DWG T070007	REV B	