

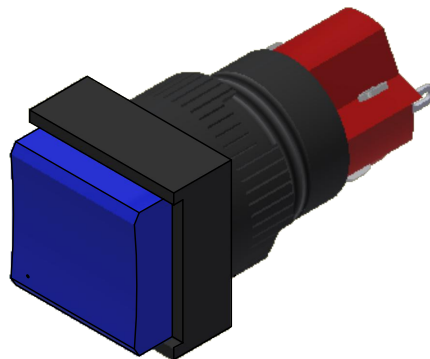
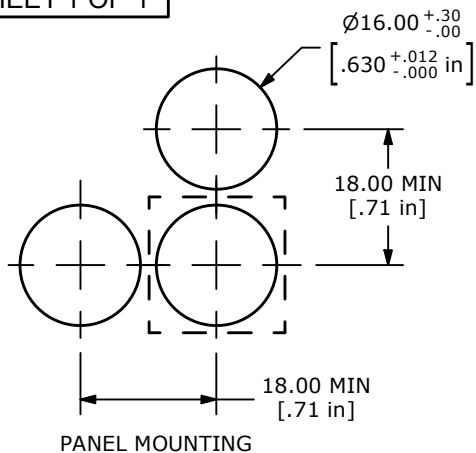

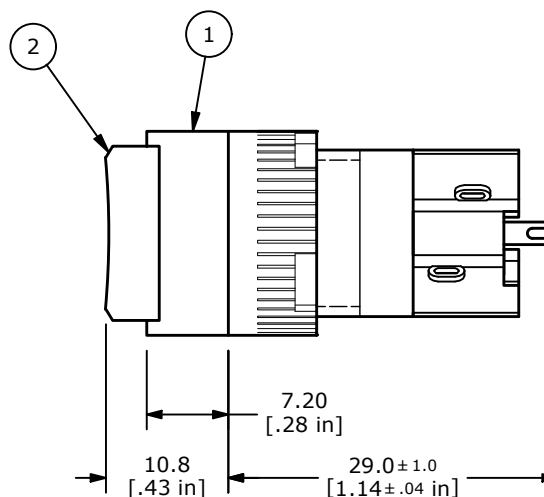


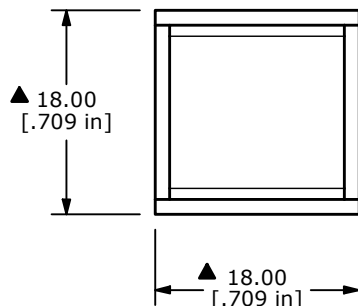

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040005	D16EES11
2	1	F050301	50-003-01 BLUE SQUARE CONCAVED



- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - RATING: 5A @ 250VAC
8A @ 125VAC
0.2A @ 250VDC
6A @ 24VDC
 - ELECTRICAL LIFE: >50,000 CYCLES
 - TRAVEL: 3.0mm FULL TRAVEL, 2.0mm LATCH
 - PANEL THICKNESS: 0.5 - 5mm
 - SEALED TO IP40.
 - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - OPERATING TEMP.: -25°C to 70°C
 - ▲ LAMP VOLTAGE: NONE
 - ▲ DENOTES CRITICAL PARAMETER.
 - PACKAGE: 20 PIECES PER BOX

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102056	Release	07/11/23	MW					100125013
					TITLE D16EES110BLU				
					SCALE 3:2	DATE 6/23/2023	DR MW	DWG XF0938P	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED