


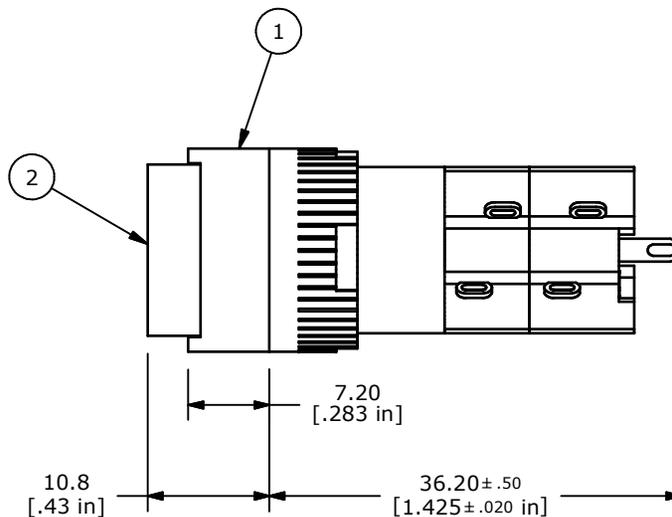


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040031	D16OAS12
2	1	F050312	50-003-12 TRANSPARENT FLAT GREEN LENS
3	1	F050431	50-004-31 6V WHITE LED

PANEL MOUNTING

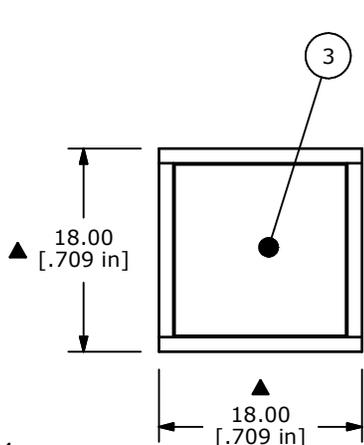

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - RATING: 5A @ 250 VAC  
6A @ 24 VDC  
8A @ 125 VAC
  - ELECTRIC LIFE: 50,000 CYCLES
  - INSULATION RESISTANCE: 1,000 MΩ MIN.
  - OPERATING TEMP.: -20°C to 55°C
  - LAMP VOLTAGE: 6VDC LED
  - ▲ DENOTES CRITICAL PARAMETER.
  - 2002/05/EC (ROHS) COMPLIANT.
  - PANEL THICKNESS: 0.5-5.0mm
  - FULL TRAVEL: 3.0mm
  - SEAL RATING: IP40



TITLE D16OAS12HWHTGRN

A	21354	RELEASED FOR PRODUCTION	1/17/14	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

SCALE	DATE	DR	DWG	REV
	1/17/2014	EBP	XF0886P	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED