

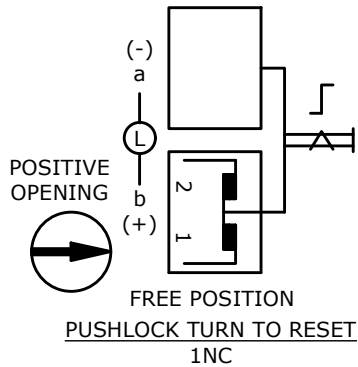
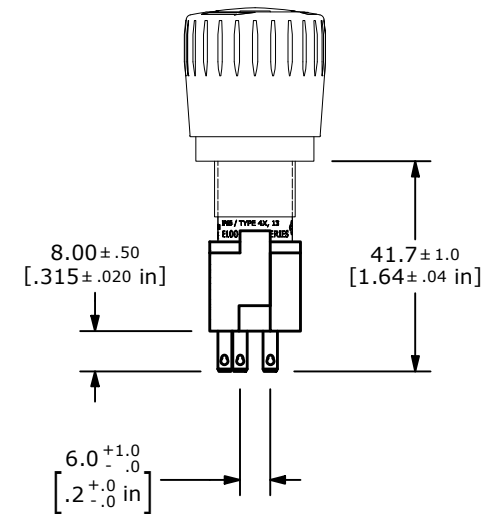


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 5mm

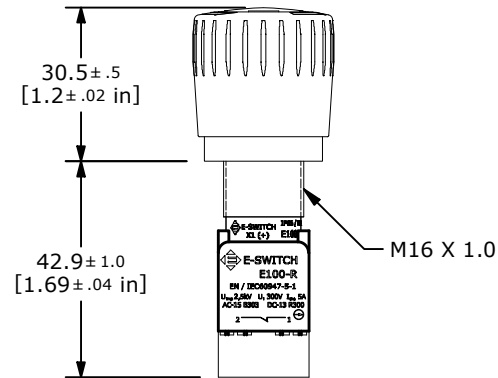


NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATINGS: 3A @ 125VAC, 1.5A @ 250VAC
0.22A @ 24VDC, 0.11A @ 250VDC
5. AGENCY APPROVALS: TUV, EN 60947-5-1 : EN 60947-5-5
6. CONTACT RESISTANCE: 50m Ω MAX. (INITIAL)
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. MECHANICAL LIFE: 100,000 CYCLES
11. OPERATING TEMPERATURE: -25°C TO 55°C
12. ▲ DENOTES CRITICAL PARAMETER
- ▲ 13. ILLUMINATION VOLTAGE: INCANDESCENT 6V AC/DC 40mA
14. HARDWARE INCLUDED (NOT SHOWN): 1 GASKET, 1 EMERGENCY STOP ID PLATE, & 1 MOUNTING RING



SIDE VIEW SHOWN
WITHOUT TERMINAL SHROUD

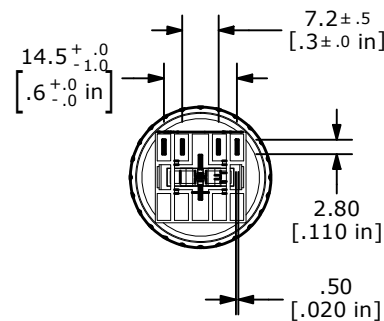

BOTTOM VIEW SHOWN
WITHOUT SHROUD ACTUATOR

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103127	NEW RELEASE	12/19/24	MR	TITLE E100-R11-G1MR				100129091
					SCALE	DATE	DR	DWG	REV
					2:3	12/12/2024	MJR	F011012	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED