





RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 5mm

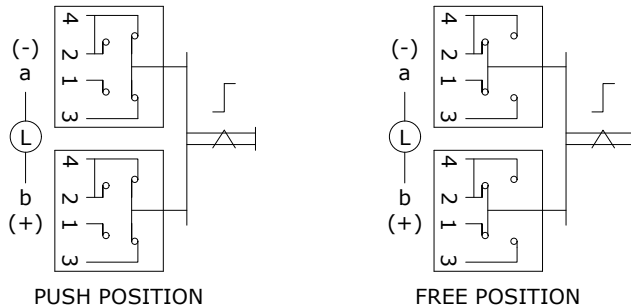


PUSHLOCK TURN TO RESET
1NO+1NC

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATINGS: 8A @ 125VAC, 5A @ 250VAC
6A @ 24VDC, 0.2A @ 250VDC
5. AGENCY APPROVALS: ANSI/UL508; EN 60947-5-1 & EN 61058-1
6. CONTACT RESISTANCE: 50m Ω MAX. (INITIAL)
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. MECHANICAL LIFE: 100,000 CYCLES
11. OPERATING TEMPERATURE: -25°C TO 55°C
12. ▲ DENOTES CRITICAL PARAMETER
13. ▲ ILLUMINATION VOLTAGE: 20mA 24V
14. HARDWARE INCLUDED (NOT SHOWN): 1 GASKET & 1 MOUNTING RING

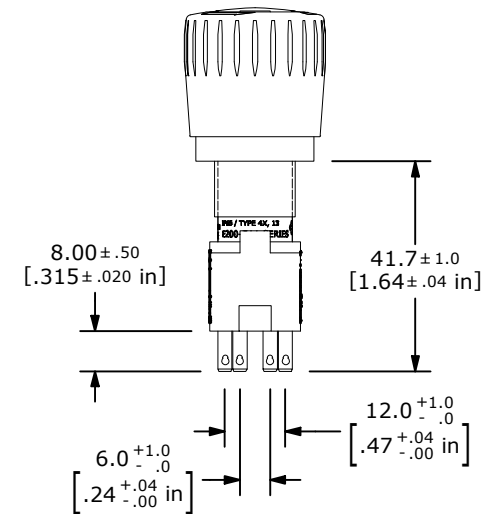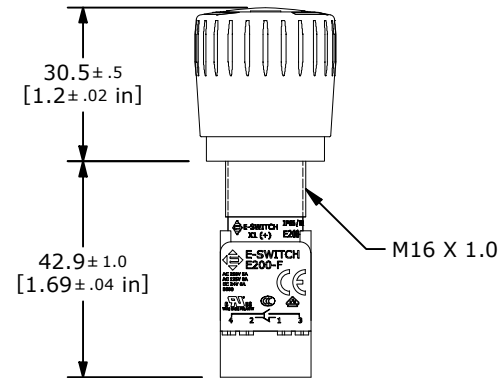

SIDE VIEW SHOWN
WITHOUT TERMINAL SHROUD

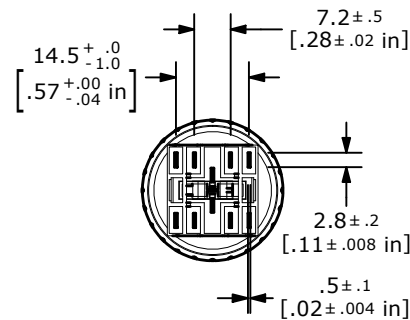

BOTTOM VIEW SHOWN
WITHOUT SHROUD ACTUATOR

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-102903	REMOVED STOP ID PLATE FROM NOTE 14	08/06/24	MR	TITLE E200-R11-A1KR				100125424
					SCALE	DATE	DR	DWG	REV
					2:3	10/3/2023	MJR	F021000	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED