

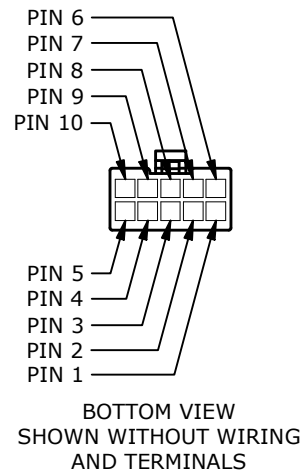
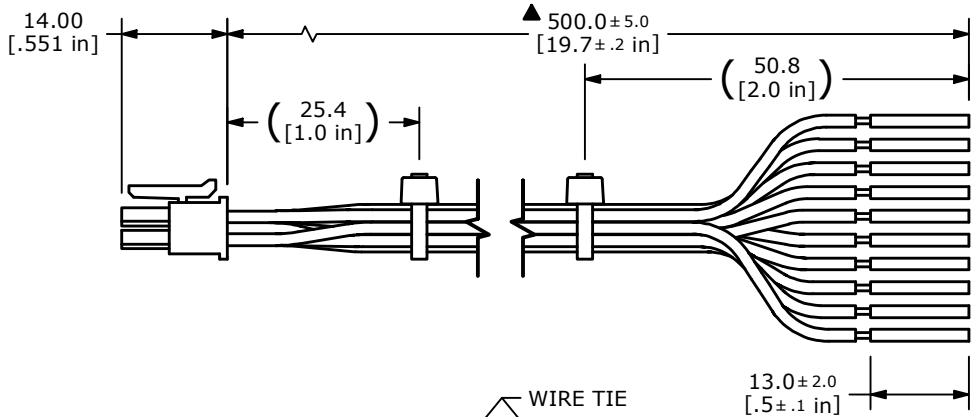



CONNECTOR	WIRE
P1-1	WIRE, 22 AWG UL1007 STRANDED, BLACK
P1-2	WIRE, 22 AWG UL1007 STRANDED, RED
P1-3	WIRE, 22 AWG UL1007 STRANDED, GREEN
P1-4	WIRE, 22 AWG UL1007 STRANDED, BLUE
P1-5	WIRE, 22 AWG UL1007 STRANDED, PURPLE
P1-6	WIRE, 22 AWG UL1007 STRANDED, YELLOW
P1-7	WIRE, 22 AWG UL1007 STRANDED, GRAY
P1-8	WIRE, 22 AWG UL1007 STRANDED, PINK
P1-9	WIRE, 22 AWG UL1007 STRANDED, ORANGE
P1-10	WIRE, 22 AWG UL1007 STRANDED, WHITE

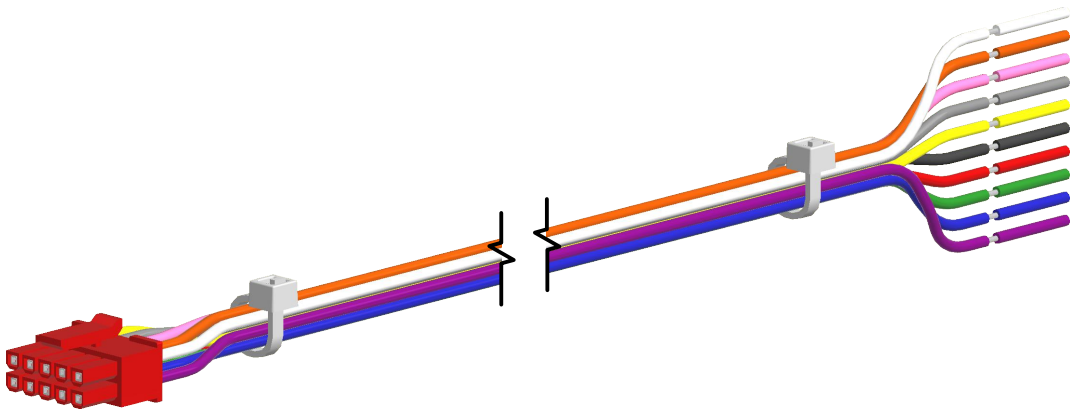

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. OPERATING TEMP: -25°C TO 85°C
5. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

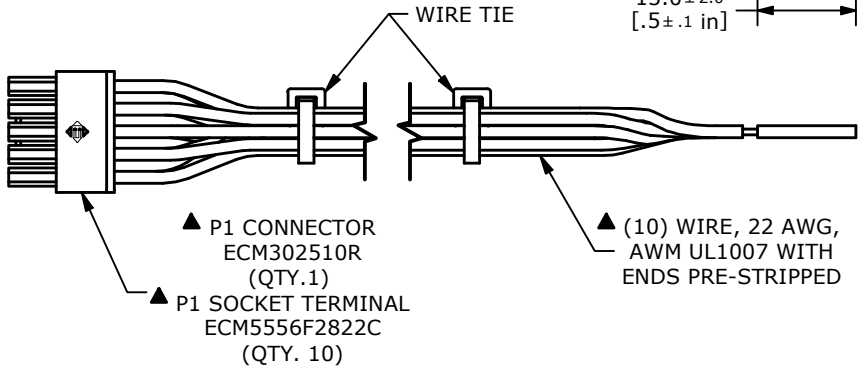

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103564	NEW RELEASE	09/26/25	MR	TITLE ECM302510RW				100130744
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1:1	DATE 8/7/2025	DR MJR	DWG ECM302510RW	REV A