

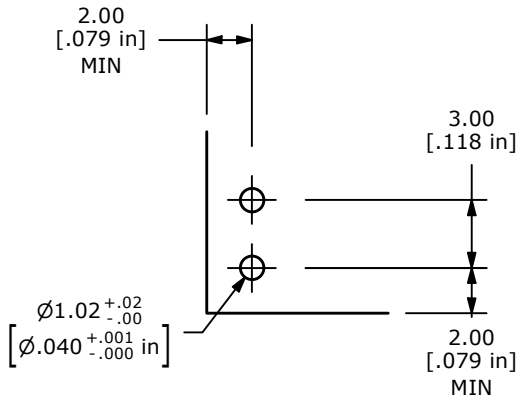







PCB LAYOUT

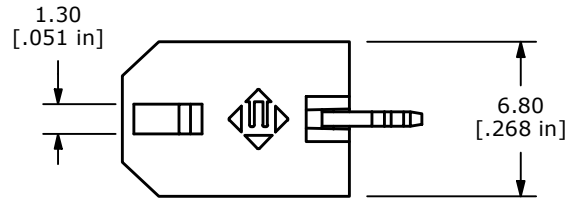

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. VOLTAGE RATING: 250 VAC
5. CURRENT RATING 5A MAX.
6. MATERIAL: PA66, UL94V-0
- ▲ 7. POLES 1-2
8. MATING CONNECTORS: SEE DATASHEET
9. CONTACT RESISTANCE: 0.015mΩ MAX.
10. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
11. TERMINAL/CONTACT MATERIAL: TIN PLATED
12. ▲ DENOTES CRITICAL PARAMETER
13. OPERATING TEMP: -25°C TO 85°C

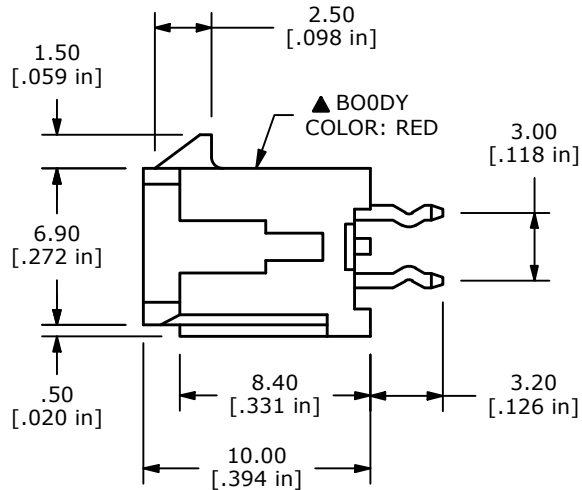

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-102530	RELEASE	07/09/24	JS	TITLE ECM-3026-02-R				100126991
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:1	DATE 3/8/2024	DR JS	DWG ECM302602R	REV A