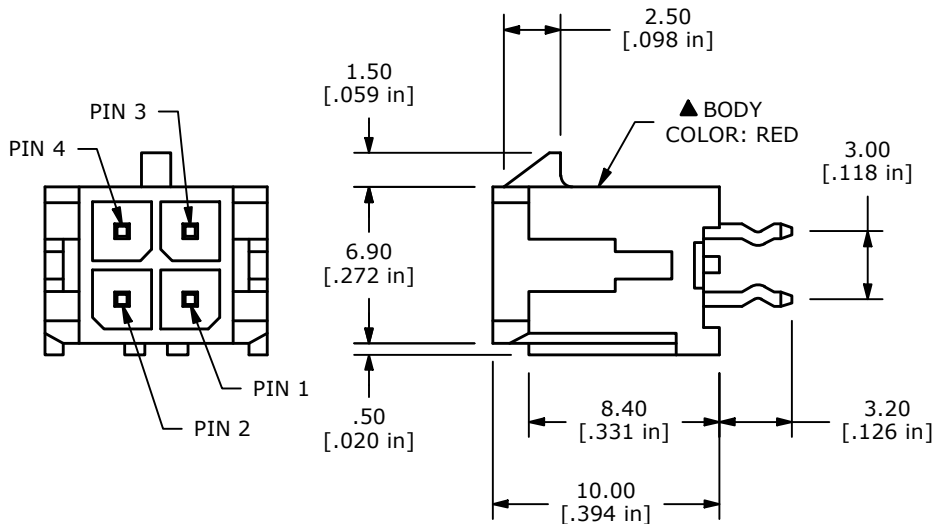

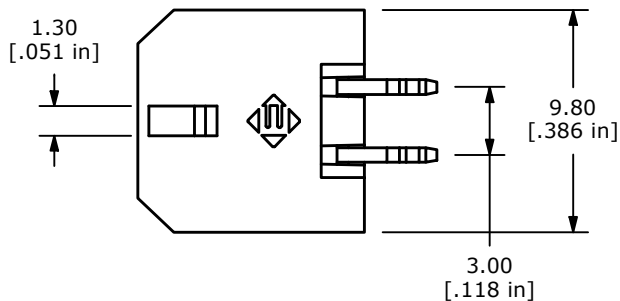
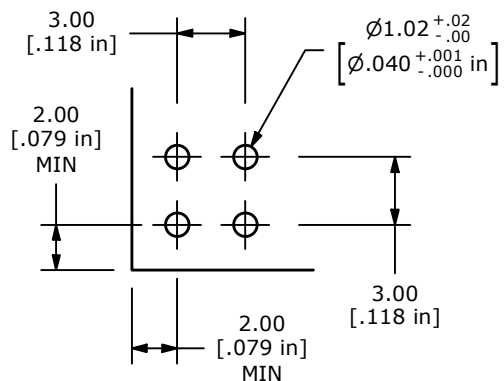


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY
4. VOLTAGE RATING: 250 VAC
5. CURRENT RATING 5A MAX.
6. MATERIAL: PA66, UL94V-0
- ▲ 7. POLES 1-4
8. MATING CONNECTORS: SEE DATASHEET
9. CONTACT RESISTANCE: 0.015mΩ MAX.
10. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
11. TERMINAL/CONTACT MATERIAL: TIN PLATED
12. ▲ DENOTES CRITICAL PARAMETER
13. OPERATING TEMP: -25°C TO 85°C

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-102530	RELEASE	07/09/24	JS						100126989
					TITLE ECM302604R					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					3:1	3/8/2024	JS	ECM302604R	A	